

KSED65BE

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709212070

Hood width 60 cm

Aesthetics Victoria

Colour White

Logo Silk screen



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight power2 WVent outlet150 mmLight colour4000 KMinimum distance from
750 mm

temperature scale (K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 635	67
-----------	----

Performance / Energy Label

_/	A'
	Ţ

Annual Efficiency 60 kWh/year Airbourne acouistical A- 53 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class (B speed (SPEmin) EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 26 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Time increase factor (F) Lighting Efficiency (LE) 100,2 lux/W **Energy Efficiency Index** 62,2 Lighting Efficiency Class A per first cavity (LEC) Measured air flow rate 355 m³/h **Grease Filtering** 74,4 % at best efficiency point Efficiency (GFE) (Qbep) **Grease Filtering** D Measured air pressure 385 Pa **Efficiency Class (GFEC)** at best efficiency point Air flow at minumum 351 m³/h (Qbep) speed (Qmin) Measured electric 146 W Maximum extraction 635 m³/h power input at best rate efficiency point (Wbep) Normal Power of the 2 W light system (WI) Average illumination of 221 lux the light on the cooking surface (Emiddle)

Electrical Connection

Nominal power 202 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Sound power level at


highest setting (Lwa)

67 dBA

Also available

Alternative colours Black, Stainless steel, availible Cream



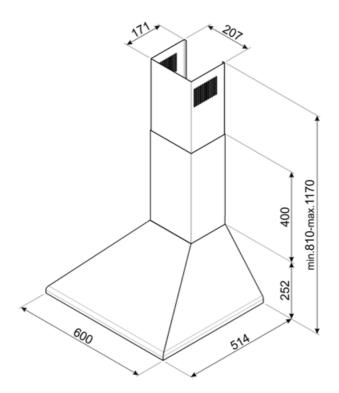



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.