

# KSED65BE

Product family Hood

Hood Type Chimney Cooker Hoods

**Design** Chimney

**Extraction** Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

**EAN code** 8017709212070

Aesthetics Victoria
Colour White
Logo Silk screen



### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight power2 WVent outlet150 mmLight colour4000 °KMinimum distance from750 mm

temperature scale (°K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 3 635	67
----------------	----

## Performance / Energy Label

**Annual Efficiency** 60 KWh/year Consumption (AEChood) Energy efficiency class ( B EEC) Fluid Dynamic Efficiency 26

Lighting Efficiency Class A

(LEC)

**Grease Filtering** 74,4 %

Efficiency (GFE)

**Efficiency Class (GFEC)** 

Air flow at minumum

Maximum extraction

rate

(FDE)

Fluid Dynamic Efficiency B class (FDEC)

Lighting Efficiency (LE) 100,2 lux/W

**Grease Filtering** D

351 m<sup>3</sup>/h speed (Qmin)

635 m<sup>3</sup>/h

Airbourne acouistical A- 53 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical Aweighted sound Power **Emission at maximum** 

Time increase factor (F) **Energy Efficiency Index** 62,2

per first cavity

speed (SPEmax)

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point (Qbep)

Measured electric power input at best

efficiency point (Wbep) Normal Power of the light system (WI)

Average illumination of the light on the cooking

surface (Emiddle) Sound power level at highest setting (Lwa)

221 lux

67 dBA

355 m<sup>3</sup>/h

385 Pa

146 W

2 W

67 dBA

### **Electrical Connection**

Nominal power Voltage

202 W 220-240 V Frequency (Hz) Power supply cable length

50-60 Hz 1000 mm


Also available

Alternative colours availible

Black, Stainless steel,

Cream



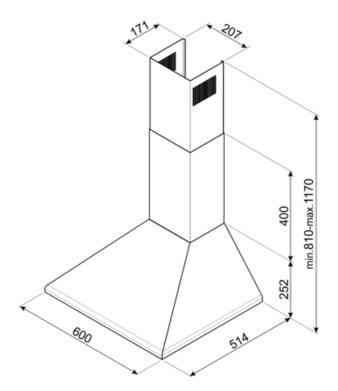



## **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.