

# KSED65NEE

**Product family**

Hood

**Hood Type**

Decorative wall hood

**Design**

Chimney

**Extraction**

Extraction

**Material**

Painted material

**Type of steel**

Brushed

**EAN code**

8017709212063

**Hood width**

60 cm

**Aesthetic**

Victoria

**Colour**

Black

**Logo**

Silk screen



## Controls

**Control setting**

Slider

## Program / Functions

**No. of speeds**

3

## Technical Features

**No. of lights**

2

**No. of filters**

2

**Light type**

LED

**Anti-grease filters**

Aluminium

**Light Power**

1 W

**Vent outlet**

150 mm

**Light color temperature scale (K)**

4000 K

**Minimum distance from GAS hob**

750 mm

**Free outlet maximum capacity**600 m<sup>3</sup>/h**Minimum distance from ELECTRIC hob**

650 mm

**Motor power**

200 W

**Non return valve**

Yes

	<b>Extraction rate IEC 61591 [m<sup>3</sup>/h]</b>	<b>Noise level IEC 60704-2-13 [dBA]</b>
Speed 1	351	53
Speed 2	420	57

Speed 3	635	67
---------	-----	----

## Performance / Energy Label


	
<b>Annual Efficiency Consumption (AEChood)</b>	60 kWh/a
<b>Energy efficiency class (EEC)</b>	B
<b>Fluid Dynamic Efficiency (FDE)</b>	26
<b>Fluid Dynamic Efficiency class (FDEC)</b>	B
<b>Lighting Efficiency (LE)</b>	100.2 lux/W
<b>Lighting Efficiency Class (LEC)</b>	A
<b>Grease Filtering Efficiency (GFE)</b>	74.4 %
<b>Grease Filtering Efficiency Class (GFEC)</b>	D
<b>Air flow at minimum speed (Qmin)</b>	351 m³/h
<b>Air flow at maximum speed (Qmax)</b>	635 m³/h
<b>Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)</b>	Airbourne acoustical A- 53 dBA
<b>Airbourne acoustical weighted sound Power Emission at maximum speed (SPEmax)</b>	Airborne acoustical A- 67 dBA
<b>Time increase factor (F)</b>	1.1
<b>Energy Efficiency Index</b>	62.2
<b>Measured air flow rate at best efficiency point (Qbep)</b>	355 m³/h
<b>Measured air pressure at best efficiency point (Pbep)</b>	385 Pa
<b>Measured electric power input at best efficiency point (Wbep)</b>	146 W
<b>Nominal Power consumption of the light system (WL)</b>	2 W
<b>Average illumination of the light on the cooking surface (Emiddle)</b>	221 lux
<b>Sound power level at highest setting (Lwa)</b>	67 dBA

## Electrical Connection

<b>Electrical connection rating</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

<b>Alternative colours available</b>	White, Stainless steel, Cream
--------------------------------------	-------------------------------

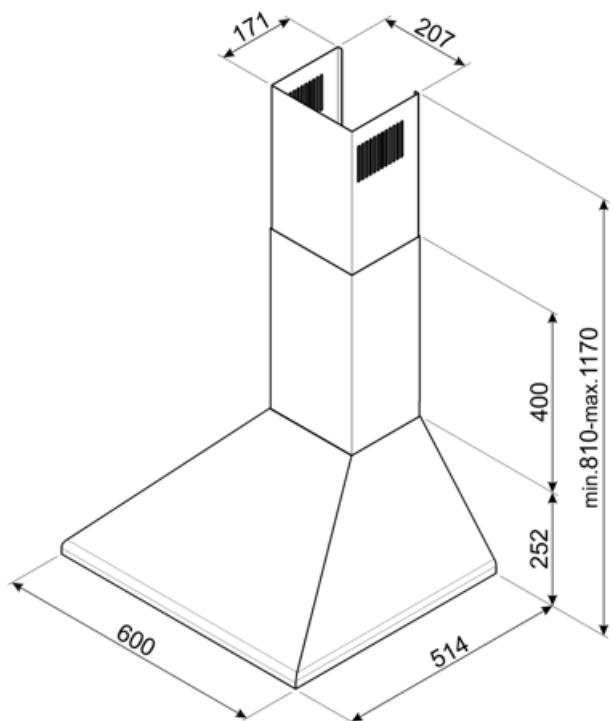

---

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.