

KSED65NEE

Product family

Hood

Hood Type

Decorative wall hood

Design

Chimney

Extraction

Extraction

Material

Painted material

Type of steel

Brushed

EAN code

8017709212063

Hood width

60 cm

Aesthetic

Victoria

Colour

Black

Logo

Silk screen



Controls

Control setting

Slider

Program / Functions

No. of speeds

3

Technical Features

**No. of lights**

2

No. of filters

2

Light type

LED

Anti-grease filters

Aluminium

Light Power

1 W

Vent outlet

150 mm

Light color temperature scale (K)

4000 K

Minimum distance from GAS hob

750 mm

Free outlet maximum capacity600 m³/h**Minimum distance from ELECTRIC hob**

650 mm

Motor power

200 W

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	351	53
Speed 2	420	57

Speed 3	635	67
---------	-----	----

Performance / Energy Label


	
Annual Efficiency Consumption (AEChood)	60 kWh/a
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	26
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	100,2 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	74,4 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minimum speed (Qmin)	351 m³/h
Air flow at maximum speed (Qmax)	635 m³/h
Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Time increase factor (F)	1,1
Energy Efficiency Index	62,2
Measured air flow rate at best efficiency point (Qbep)	355 m³/h
Measured air pressure at best efficiency point (Pbep)	385 Pa
Measured electric power input at best efficiency point (Wbep)	146 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	221 lux
Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Electrical connection rating	202 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	White, Stainless steel, Cream
--------------------------------------	-------------------------------

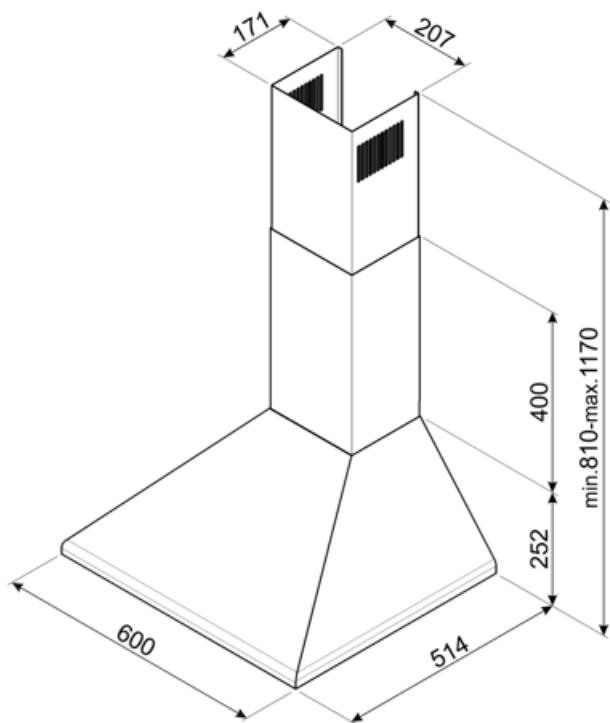

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.