

KSED65PE

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Painted material

Type of steel Brushed

EAN code 8017709206062

AestheticVictoriaColourCreamLogoSilk screen



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 °KMinimum distance from750 mm

scale (°K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 3 635	67
----------------	----

74,4 %

635 m³/h

Performance / Energy Label

Annual Efficiency 60 kWh/a Consumption (AEChood) Energy efficieency class B (EEC) Fluid Dynamic Efficiency 26 (FDE) Fluid Dynamic Efficiency B class (FDEC) Lighting Efficiency (LE) 100,2 lux/W Lighting Efficiency Class A

(LEC) **Grease Filtering**

Efficiency (GFE) **Grease Filtering** D Efficiency Class (GFEC)

Air flow at minumum 351 m³/h

speed (Qmin)

Air flow at maximum speed (Qmax)

Airbourne acouistical A- 53 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-67 dBA weighted sound Power **Emission at maximum** speed (SPEmax)

Time increase factor (F) 1,1 **Energy Efficiency Index** 62,2 355 m³/h Measured air flow rate

at best efficiency point (Qbep)

Measured air pressure 385 Pa at best efficiency point

(Pbep)

Measured electric 146 W power input at best

efficiency point (Wbep) **Nominal Power**

consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle) Sound power level at highest setting (Lwa)

67 dBA

221 lux

2 W

Electrical Connection

Electrical connection

rating

220-240 V Voltage

Frequency (Hz) Power supply cable

length

50-60 Hz 1000 mm

Also available


Alternative colours availible

White, Black, Stainless

steel

202 W



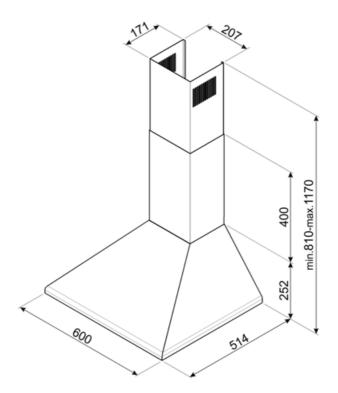



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

