

# KSED65PE

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Ducted out or re-circulation possible
Material	Painted material
Type of steel	Brushed
EAN code	8017709206062
Hood width	60 cm



## Aesthetics

Aesthetics Colour	Victoria Cream	Logo	Silk screen
-------------------	----------------	------	-------------



## Controls

Control setting	Slider
-----------------	--------

## Programs / Functions

No. of speeds	3
---------------	---

## Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	600 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	351	53
Speed 2	420	57
Speed 3	635	67

## Performance / Energy Label

**B**


Annual Efficiency Consumption (AEChood)	60 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dB(A)
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dB(A)
Fluid Dynamic Efficiency (FDE)	26	Time increase factor (F)	1.1
Fluid Dynamic Efficiency class (FDEC)	B	Energy Efficiency Index per first cavity	62.2
Lighting Efficiency (LE)	100.2 lux/W	Measured air flow rate at best efficiency point (Qbep)	355 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Qbep)	385 Pa
Grease Filtering Efficiency (GFE)	74.4 %	Measured electric power input at best efficiency point (Wbep)	146 W
Grease Filtering Efficiency Class (GFEC)	D	Normal Power of the light system (WI)	2 W
Air flow at minumum speed (Qmin)	351 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	221 lux
Maximum extraction rate	635 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dB(A)

## Electrical Connection

Nominal power	202 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

## Also available

Alternative colours available	White, Black, Stainless steel
-------------------------------	-------------------------------

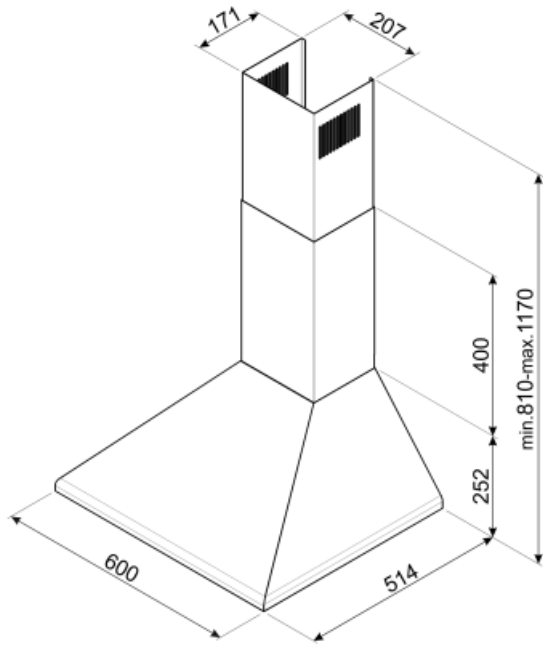

## Not included accessories

---



**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**B:** Product energy rating, measured from A+++ to D / G depending on the product family.