

# KSED65PE

Product family Hood

Hood Type Chimney Cooker Hoods

**Design** Chimney

**Extraction** Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

**EAN code** 8017709206062

Hood width60 cmAestheticsVictoriaColourCreamLogoSilk screen



#### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight power1 WVent outlet150 mmLight colour4000 KMinimum distance from750 mm

temperature scale (K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 635	67
-----------	----

### Performance / Energy Label

_/	A'
	Ţ.

**Annual Efficiency** 60 kWh/year Airbourne acouistical A- 53 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class ( B speed (SPEmin) EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 26 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Time increase factor (F) Lighting Efficiency (LE) 100,2 lux/W **Energy Efficiency Index** 62,2 Lighting Efficiency Class A per first cavity (LEC) Measured air flow rate 355 m<sup>3</sup>/h **Grease Filtering** 74,4 % at best efficiency point Efficiency (GFE) (Qbep) **Grease Filtering** D Measured air pressure 385 Pa **Efficiency Class (GFEC)** at best efficiency point Air flow at minumum 351 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured electric 146 W Maximum extraction 635 m<sup>3</sup>/h power input at best rate efficiency point (Wbep) Normal Power of the 2 W light system (WI) Average illumination of 221 lux the light on the cooking surface (Emiddle)

#### **Electrical Connection**

Nominal power 202 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Sound power level at


highest setting (Lwa)

67 dBA

### Also available

Alternative colours White, Black, Stainless availible steel



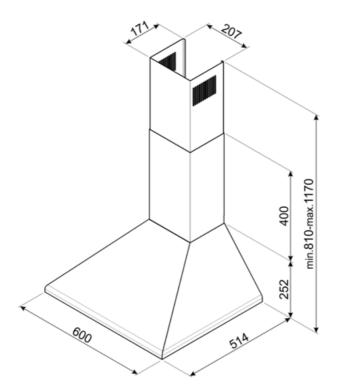



# **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.