

KSED65PE

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialPainted material

Type of steel Brushed

EAN code 8017709206062

Hood width60 cmAestheticVictoriaColourCreamLogoSilk screen



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 3 635	67
----------------	----

Performance / Energy Label

Annual Efficiency 60 kWh/a Consumption (AEChood) Energy efficieency class B (EEC)

(FDE)

Fluid Dynamic Efficiency B

Lighting Efficiency (LE) 100,2 lux/W

Lighting Efficiency Class A (LEC)

Grease Filtering

Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum

Air flow at maximum speed (Qmax)

Fluid Dynamic Efficiency 26

class (FDEC)

74,4 %

D

351 m³/h speed (Qmin)

635 m³/h

Airbourne acouistical A- 53 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical Aweighted sound Power

Emission at maximum speed (SPEmax)

Time increase factor (F) 1,1 **Energy Efficiency Index** 62,2 Measured air flow rate

at best efficiency point (Qbep)

Measured air pressure at best efficiency point

(Pbep)

Measured electric

power input at best efficiency point (Wbep)

Nominal Power consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle)

Sound power level at highest setting (Lwa) 67 dBA

355 m³/h

385 Pa

146 W

2 W

221 lux

67 dBA

1000 mm

Electrical Connection

Electrical connection

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

length

Plug Not present

Also available


Alternative colours available

White, Black, Stainless

steel

202 W



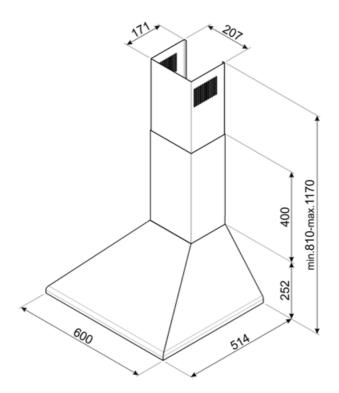



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.