

# KSED65PE

|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Tipo de Exaustor     | Decorative wall hood |
| Design               | Chimney              |
| Extraction           | Extraction           |
| Electronic control   | No                   |
| Perimeter extraction | No                   |
| Material             | Painted material     |
| Type of steel        | Brushed              |
| EAN code             | 8017709206062        |
| Hood width           | 60 cm                |
| Aesthetic            | Victoria             |
| Colour               | Cream                |
| Logotipo             | Logotipo serigrafado |



## Controls

|                 |        |         |    |
|-----------------|--------|---------|----|
| Control setting | Slider | Display | No |
|-----------------|--------|---------|----|

## Program / Functions

|                         |    |
|-------------------------|----|
| No. of speeds           | 3  |
| Intensive speed         | No |
| 24h air filter function | No |
| Other functions         | No |
| Time-setting options    | No |
| Other options           | No |
| Ventilação automática   | No |

## Technical Features

|                                                                                    |                                                                                     |                                    |           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------|-----------|
|  |  |                                    |           |
| Hood without motor                                                                 | No                                                                                  | No. of filters                     | 2         |
| Remote motor                                                                       | No                                                                                  | Anti-grease filters                | Aluminium |
| No. of lights                                                                      | 2                                                                                   | Charcoal filters included          | No        |
| Light type                                                                         | LED                                                                                 | Filter replacement indicator       | No        |
| Light Power                                                                        | 1 W                                                                                 | Vent outlet                        | 150 mm    |
| Dimmer mode                                                                        | No                                                                                  | Minimum distance from GAS hob      | 750 mm    |
| Escala de temperatura de cor clara (K)                                             | 4000 K                                                                              | Minimum distance from ELECTRIC hob | 650 mm    |
| Free outlet maximum capacity                                                       | 600 m³/h                                                                            | Non return valve                   | Yes       |
| Motor power                                                                        | 200 W                                                                               |                                    |           |

|         | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-<br>13 [dBA] |
|---------|-------------------------------------|--------------------------------------|
| Speed 1 | 351                                 | 53                                   |
| Speed 2 | 420                                 | 57                                   |
| Speed 3 | 635                                 | 67                                   |

## Accessories Included

|                |    |                |    |
|----------------|----|----------------|----|
| Remote control | No | Tube reduction | No |
| Sliding door   | No |                |    |

## Performance / Energy Label



|                                          |             |                                                                                |          |
|------------------------------------------|-------------|--------------------------------------------------------------------------------|----------|
| Consumo anual de energía (CAE exaustor)  | 60 kWh/a    | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 53 dBA   |
| Energy efficiency class (EEC)            | B           | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 67 dBA   |
| Fluid Dynamic Efficiency (FDE)           | 26          | Time increase factor (F)                                                       | 1,1      |
| Fluid Dynamic Efficiency class (FDEC)    | B           | Energy Efficiency Index                                                        | 62,2     |
| Lighting Efficiency (LE)                 | 100,2 lux/W | Measured air flow rate at best efficiency point (Qbep)                         | 355 m³/h |
| Lighting Efficiency Class (LEC)          | A           | Measured air pressure at best efficiency point (Pbep)                          | 385 Pa   |
| Grease Filtering Efficiency (GFE)        | 74,4 %      | Measured electric power input at best efficiency point (Wbep)                  | 146 W    |
| Grease Filtering Efficiency Class (GFEC) | D           | Nominal Power consumption of the light system (WL)                             | 2 W      |
| Air flow at minumum speed (Qmin)         | 351 m³/h    | Average illumination of the light on the cooking surface (Emiddle)             | 221 lux  |
| Air flow at maximum speed (Qmax)         | 635 m³/h    | Sound power level at highest setting (Lwa)                                     | 67 dBA   |


## Electrical Connection

|                              |           |                                    |         |
|------------------------------|-----------|------------------------------------|---------|
| Electrical connection rating | 202 W     | Comprimento do cabo de alimentação | 1000 mm |
| Voltage                      | 220-240 V | Plug                               | No      |
| Frequency (Hz)               | 50-60 Hz  |                                    |         |

## Also available

---

Outras cores disponíveis Branca, Preta, Aço inox

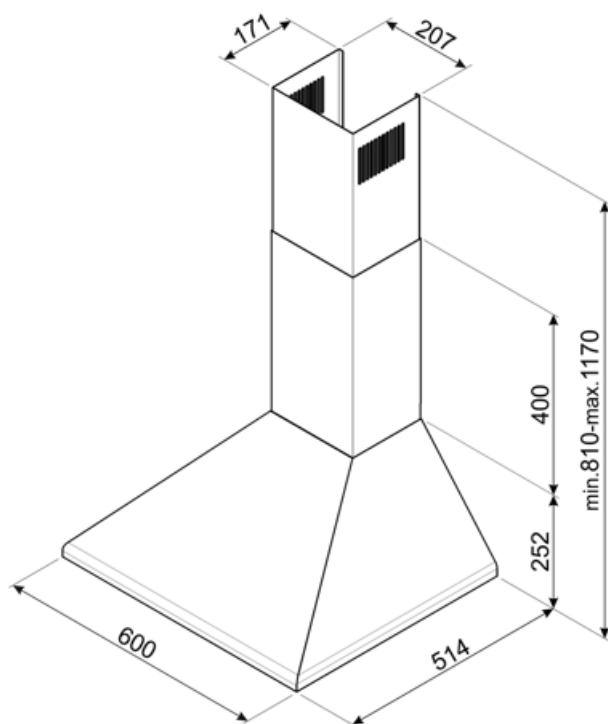

---

## Compatible Accessories

---



### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos

---

## Symbols glossary

---



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.