

# KSED65XE

**Product family**

Hood

**Hood Type**

Chimney Cooker Hoods

**Design**

Chimney

**Extraction**

Ducted out or re-circulation possible

**Material**

Stainless steel

**Type of steel**

Brushed

**EAN code**

8017709206079

**Hood width**

60 cm

**Aesthetics**

Universal

**Colour**

Stainless steel

**Finishing**

Brushed

**Logo**

Embossed



## Controls

**Control setting**

Slider

## Program / Functions

**No. of speeds**

3

## Technical Features



**No. of lights**

2

**No. of filters**

2

**Light type**

LED

**Anti-grease filters**

Aluminium

**Light power**

1 W

**Vent outlet**

150 mm

**Light colour**

4000 K

**Minimum distance from GAS hob**

750 mm

**temperature scale (K)**

600 m<sup>3</sup>/h

**Minimum distance from ELECTRIC hob**

650 mm

**Free outlet maximum capacity**

200 W

**Non return valve**

Yes

	<b>Extraction rate IEC 61591 [m<sup>3</sup>/h]</b>	<b>Noise level IEC 60704-2-13 [dBA]</b>
Speed 1	351	53
Speed 2	420	57

Speed 3	635	67
---------	-----	----

## Performance / Energy Label


	<b>Annual Efficiency Consumption (AEChood)</b>	60 kWh/year	<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	53 dBA
	<b>Energy efficiency class (EEC)</b>	B	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	67 dBA
	<b>Fluid Dynamic Efficiency (FDE)</b>	26	<b>Time increase factor (F)</b>	1.1
	<b>Fluid Dynamic Efficiency class (FDEC)</b>	B	<b>Energy Efficiency Index per first cavity</b>	62.2
	<b>Lighting Efficiency (LE)</b>	100.2 lux/W	<b>Measured air flow rate at best efficiency point (Qbep)</b>	355 m³/h
	<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air pressure at best efficiency point (Qbep)</b>	385 Pa
	<b>Grease Filtering Efficiency (GFE)</b>	74.4 %	<b>Measured electric power input at best efficiency point (Wbep)</b>	146 W
	<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Normal Power of the light system (WI)</b>	2 W
	<b>Air flow at minimum speed (Qmin)</b>	351 m³/h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	221 lux
	<b>Maximum extraction rate</b>	635 m³/h	<b>Sound power level at highest setting (Lwa)</b>	67 dBA

## Electrical Connection

<b>Nominal power</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V		
<b>Frequency (Hz)</b>	50-60 Hz	<b>Plug</b>	No

## Also available

<b>Alternative colours available</b>	White, Black, Cream	<b>Available colours</b>	KSED65BE - KSED65NE - KSED65PE
--------------------------------------	---------------------	--------------------------	--------------------------------

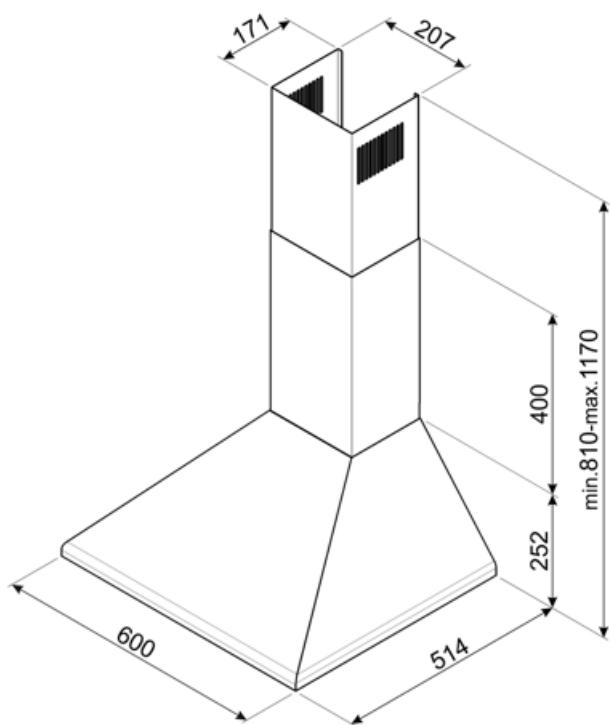

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.