

KSED65XE

Product family

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Hood

Stainless steel Material Type of steel Brushed

EAN code 8017709206079

Hood width 60 cm



Aesthetics

Universal Brushed **Aesthetics** Finishing Colour Stainless steel **Embossed** Logo

Controls

Control setting Slider

Programs / Functions

3 No. of speeds

Technical Features



No. of lights

2 Light type **LED** Anti-grease filters Light power 1 W Vent outlet Light colour 4000 °K Minimum distance from

temperature scale (°K)

Free outlet maximum 600 m³/h

capacity

Motor power 200 W No. of filters 2

Aluminium 150 mm 750 mm

650 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57
Speed 3	635	67

Performance / Energy Label

	Ķ.
	'n

Annual Efficiency 60 KWh/year Airbourne acouistical A- 53 dBA
Consumption (AEChood) weighted sound Power
Energy efficiency class (B Emission at minimum speed (SPEmin)

Fluid Dynamic Efficiency 26

(FDE)

Speed (SPEmin)

Airborne acoustical A- 67 dBA

weighted sound Power

Fluid Dynamic Efficiency B
class (FDEC)

weighted sound Fower
Emission at maximum
speed (SPEmax)

Lighting Efficiency (LE) 100,2 lux/W

Time increase factor (F) 1,1

Energy Efficiency Index 62.2

Lighting Efficiency Class A Energy Efficiency Index 62, (LEC) Energy Efficiency Index 62,

Grease Filtering 74,4 %

Efficiency (GFE)

Measured air flow rate 355 m³/h
at best efficiency point
(Qbep)

Grease Filtering D

Efficiency Class (GFEC)

Measured air pressure 385 Pa
at best efficiency point

Air flow at minumum 351 m³/h (Qbep)

speed (Qmin)

Maximum extraction 635 m³/h

Measured electric 146 W

rate power input at best efficiency point (Wbep)

Normal Power of the 2 W

light system (WI)

Average illumination of 221 lux the light on the cooking

surface (Emiddle)
Sound power level at 67 dBA
highest setting (Lwa)


Electrical Connection

Nominal power 202 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Also available

Alternative colours White, Black, Cream Available colours KSED65BE - KSED65NE - availible KSED65PE



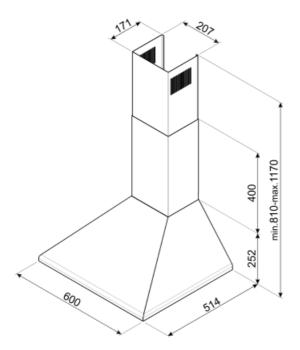



Not included accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

