

KSED65XE

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709206079

Hood width 60 cm

Aesthetic Universale

Colour Stainless steel

Finishing Satin
Logo Embossed



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 3 635	67
----------------	----

635 m³/h

Performance / Energy Label

B A

Annual Efficiency 60 kWh/a Consumption (AEChood) Energy efficieency class B (EEC) Fluid Dynamic Efficiency 26 (FDE) Fluid Dynamic Efficiency B class (FDEC) Lighting Efficiency (LE) 100,2 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 74,4 % Efficiency (GFE) **Grease Filtering** D Efficiency Class (GFEC) Air flow at minumum 351 m³/h

Airbourne acouistical A- 53 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-67 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Time increase factor (F) 1,1 **Energy Efficiency Index** 62,2 Measured air flow rate 355 m³/h at best efficiency point (Qbep) Measured air pressure 385 Pa at best efficiency point Measured electric 146 W power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 221 lux

Electrical Connection

Electrical connection 202 W

rating

speed (Qmin)

speed (Qmax)

Air flow at maximum

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

the light on the cooking surface (Emiddle) Sound power level at

highest setting (Lwa)

length

Plug Not present

Also available

Alternative colours available

White, Black, Cream

Available colours


KSED65BE - KSED65NE -

KSED65PE

67 dBA

1000 mm



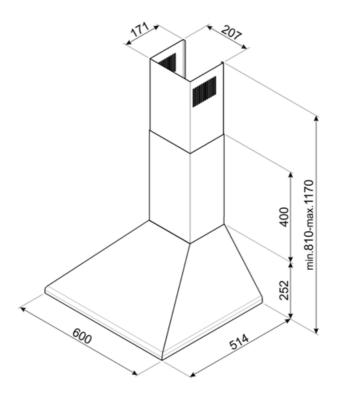



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.