

KSED65XE

Product family

Hood
Decorative wall hood
Chimney
Extraction
Stainless steel
Brushed
8017709206079
60 cm
Universale
Stainless steel
Satin
Embossed



Controls

Control setting	Slider
-----------------	--------

Program / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	600 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	351	53
Speed 2	420	57

Speed 3	635	67
---------	-----	----

Performance / Energy Label


	
Annual Efficiency Consumption (AEChood)	60 kWh/a
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	26
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	100.2 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	74.4 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minimum speed (Qmin)	351 m³/h
Air flow at maximum speed (Qmax)	635 m³/h
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Time increase factor (F)	1.1
Energy Efficiency Index	62.2
Measured air flow rate at best efficiency point (Qbep)	355 m³/h
Measured air pressure at best efficiency point (Pbep)	385 Pa
Measured electric power input at best efficiency point (Wbep)	146 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	221 lux
Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Electrical connection rating	202 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	White, Black, Cream	Available colours	KSED65BE - KSED65NE - KSED65PE
--------------------------------------	---------------------	--------------------------	--------------------------------

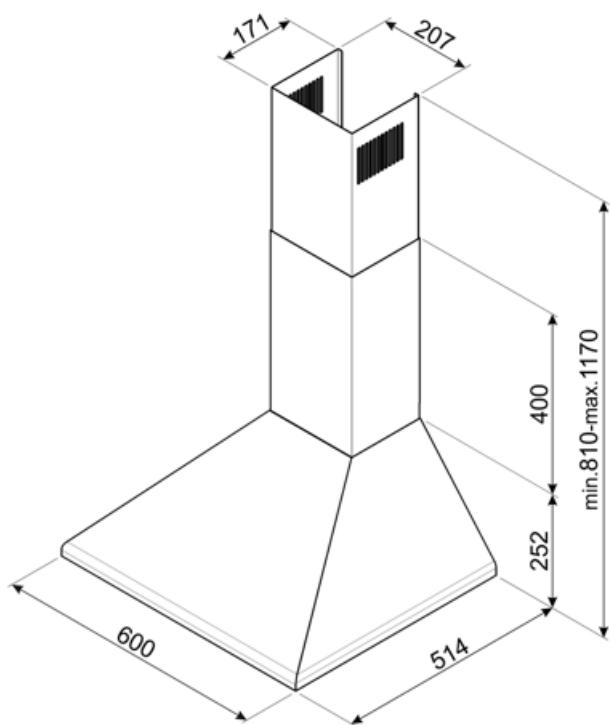

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.