

# KSED75XE

## Product family

Hood

## Hood Type

Chimney Cooker Hoods

## Design

Chimney

## Extraction

Ducted out or re-circulation possible

## Material

Stainless steel

## Type of steel

Brushed

## EAN code

8017709206086

## Hood width

70 cm

## Aesthetics

Universal

## Colour

Stainless steel

## Finishing

Brushed

## Logo

Embossed



## Controls

### Control setting

Slider

## Program / Functions

### No. of speeds

3

## Technical Features



### No. of lights

2

### No. of filters

2

### Light type

LED

### Anti-grease filters

Aluminium

### Light power

1 W

### Vent outlet

150 mm

### Light colour

4000 K

### Minimum distance from GAS hob

750 mm

### temperature scale (K)

595 m<sup>3</sup>/h

### Minimum distance from ELECTRIC hob

650 mm

### Free outlet maximum capacity

200 W

### Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	351	53
Speed 2	420	57


Speed 3	635	67
---------	-----	----

## Performance / Energy Label

	<b>Annual Efficiency Consumption (AEChood)</b>	60 kWh/year	<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	53 dBA
	<b>Energy efficiency class ( EEC)</b>	B	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	67 dBA
	<b>Fluid Dynamic Efficiency (FDE)</b>	26	<b>Time increase factor (F)</b>	1,1
	<b>Fluid Dynamic Efficiency class (FDEC)</b>	B	<b>Energy Efficiency Index per first cavity</b>	62,2
	<b>Lighting Efficiency (LE)</b>	100,2 lux/W	<b>Measured air flow rate at best efficiency point (Qbep)</b>	355 m <sup>3</sup> /h
	<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air pressure at best efficiency point (Qbep)</b>	385 Pa
	<b>Grease Filtering Efficiency (GFE)</b>	74,4 %	<b>Measured electric power input at best efficiency point (Wbep)</b>	146 W
	<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Normal Power of the light system (WI)</b>	2 W
	<b>Air flow at minimum speed (Qmin)</b>	351 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	221 lux
	<b>Maximum extraction rate</b>	635 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	67 dBA

## Electrical Connection

<b>Nominal power</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V		
<b>Frequency (Hz)</b>	50-60 Hz	<b>Plug</b>	No

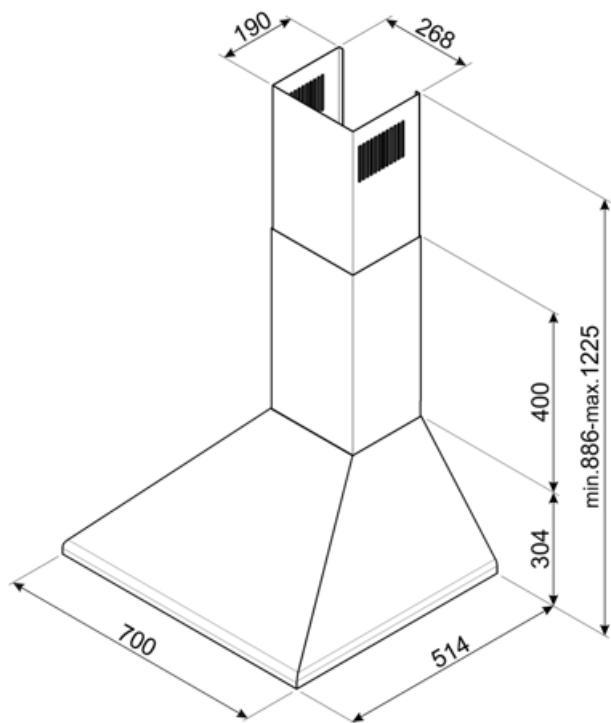

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.