

# KSED75XE

|                |                      |
|----------------|----------------------|
| Product family | Hood                 |
| Hood Type      | Decorative wall hood |
| Design         | Chimney              |
| Extraction     | Extraction           |
| Material       | Stainless steel      |
| Type of steel  | Brushed              |
| EAN code       | 8017709206086        |
| Hood width     | 70 cm                |



## Aesthetics

|                  |                            |                |                |
|------------------|----------------------------|----------------|----------------|
| Aesthetic Colour | Universale Stainless steel | Finishing Logo | Satin Embossed |
|------------------|----------------------------|----------------|----------------|



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Programme / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features

|  |   |                                    |           |
|--|---|------------------------------------|-----------|
|  |  |                                    |           |
| No. of lights  | 2   | No. of filters                     | 2         |
| Light type   | LED   | Anti-grease filters                | Aluminium |
| Light Power  | 1 W   | Vent outlet                        | 150 mm    |
| Light color temperature scale (°K)   | 4000 °K   | Minimum distance from GAS hob      | 750 mm    |
| Free outlet maximum capacity   | 595 m <sup>3</sup> /h   | Minimum distance from ELECTRIC hob | 650 mm    |
| Motor power  | 200 W   | Non return valve                   | Yes       |

|            | Extraction rate IEC<br>61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13<br>[dB(A)] |
|------------|--|---------------------------------------|
| Speed<br>1 | 351  | 53                                    |
| Speed<br>2 | 420  | 57                                    |
| Speed<br>3 | 635  | 67                                    |


## Performance / Energy Label



|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEchood)  | 60 kWh/a              | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 53 dB(A)              |
| Energy efficiency class (EEC)            | B                     | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 67 dB(A)              |
| Fluid Dynamic Efficiency (FDE)           | 26                    | Time increase factor (F)   | 1,1                   |
| Fluid Dynamic Efficiency class (FDEC)    | B                     | Energy Efficiency Index  | 62,2                  |
| Lighting Efficiency (LE)                 | 100,2 lux/W           | Measured air flow rate at best efficiency point (Qbep)                         | 355 m <sup>3</sup> /h |
| Lighting Efficiency Class (LEC)          | A                     | Measured air pressure at best efficiency point (Pbep)                          | 385 Pa                |
| Grease Filtering Efficiency (GFE)        | 74,4 %                | Measured electric power input at best efficiency point (Wbep)                  | 146 W                 |
| Grease Filtering Efficiency Class (GFEC) | D                     | Nominal Power consumption of the light system (WL)                             | 2 W                   |
| Air flow at minumum speed (Qmin)         | 351 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 221 lux               |
| Air flow at maximum speed (Qmax)         | 635 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 67 dB(A)              |

## Electrical Connection

|                              |             |                           |          |
|------------------------------|-------------|---------------------------|----------|
| Plug                         | Not present | Frequency (Hz)            | 50-60 Hz |
| Electrical connection rating | 202 W       | Power supply cable length | 1000 mm  |
| Voltage                      | 220-240 V   |                           |          |

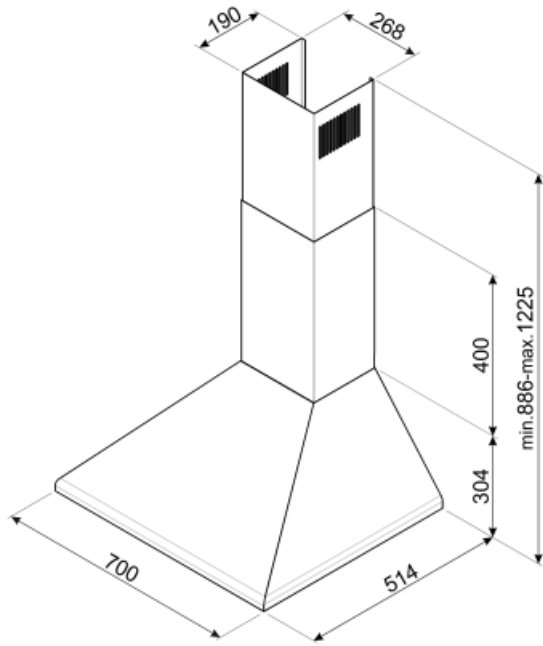

---

## Not included accessories

---



**FLT6**

Round Charcoal filters (kit 2 pieces)



**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.