

KSED75XE

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709206086

Hood width70 cmAestheticUniversaleColourStainless steel

Finishing Satin
Logo Embossed



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 595 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	351	53
Speed 2	420	57



Speed 635	67
-----------	----

Performance / Energy Label

_/	A'
	Ţ.

Annual Efficiency 60 kWh/a Airbourne acouistical A- 53 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 26 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Time increase factor (F) 1,1 Lighting Efficiency (LE) 100,2 lux/W **Energy Efficiency Index** 62,2 Lighting Efficiency Class A Measured air flow rate 355 m³/h (LEC) at best efficiency point **Grease Filtering** 74,4 % (Qbep) Efficiency (GFE) Measured air pressure 385 Pa **Grease Filtering** at best efficiency point **Efficiency Class (GFEC)** (Pbep) Air flow at minumum 351 m³/h Measured electric 146 W speed (Qmin) power input at best Air flow at maximum 635 m³/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 221 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 202 W Power supply cable 1000 mm rating length


Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz

Sound power level at

highest setting (Lwa)

67 dBA



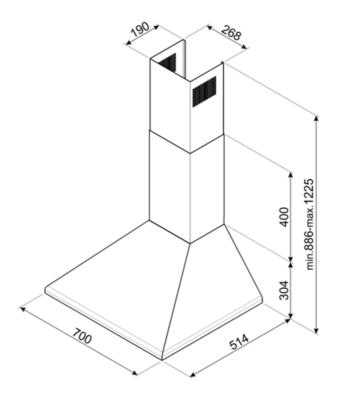



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.