

# KSED95AE

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Painted material
Type of steel Brushed

EAN code 8017709212209

Hood width 90 cm



#### **Aesthetics**

Aesthetic Universale Logo Embossed

Colour Anthracite

#### **Controls**

Control setting Slider

### **Programs / Functions**

No. of speeds 3

#### **Technical Features**



No of lights

No. of lights 2 Anti-grease filters Aluminium
Light type LED Charcoal filters included Yes
Light Power 1 W Vent outlet 150 mm
Light color temperature 4000 °K Minimum distance from 750 mm

scale (°K) GAS hob

Free outlet maximum 595 m³/h Minimum distance from 650 mm capacity ELECTRIC hob

Motor power 200 W
No. of filters 3 Non return valve Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	328	50
Speed 2	420	57
Speed 3	588	65

### Performance / Energy Label

4	A.
	Ď

**Annual Efficiency** Consumption (AEChood) Energy efficieency class B (EEC)

(FDE)

Fluid Dynamic Efficiency B

class (FDEC)

Lighting Efficiency (LE) 74,3 lux/W

Lighting Efficiency Class A

(LEC)

**Grease Filtering** 70,8 %

Efficiency (GFE)

Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin)

speed (Qmax)

54 kWh/a

Fluid Dynamic Efficiency 25,3

**Grease Filtering** D

328 m<sup>3</sup>/h

Air flow at maximum 588 m<sup>3</sup>/h Airbourne acouistical A- 50 dB(A)

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-65 dB(A) weighted sound Power

Emission at maximum speed (SPEmax)

Time increase factor (F) **Energy Efficiency Index** 61,2 318 m<sup>3</sup>/h

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure 375 Pa

at best efficiency point

(Pbep)

Measured electric 131 W power input at best

efficiency point (Wbep)

**Nominal Power** 2 W consumption of the light

system (WL)

Average illumination of

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

164 lux

65 dB(A)

#### **Electrical Connection**

Plug Not present **Electrical connection** 202 W

rating

Voltage 220-240 V Frequency (Hz) Power supply cable

length

50-60 Hz 1000 mm

#### Also available


Alternative colours availible

Black, Stainless steel, Cream, Red Wine

Available colours

KSED95NEE - KSED95XE -KSED95PE - KSED95RWE



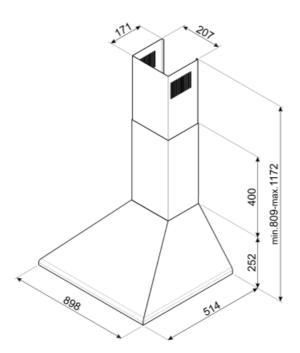



### Not included accessories

FLT6



Round Charcoal filters (kit 2 pieces)



#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



## Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

