

# KSED95AE

**Product family** Hood

**Hood Type** Decorative wall hood

Design Chimney Extraction Extraction Material Painted material Type of steel Brushed

**EAN** code 8017709212209

Hood width 90 cm



#### **Aesthetics**

Universale **Embossed Aesthetic** Logo

Colour Anthracite

#### **Controls**

Control setting Slider

#### **Technical Features**

2 No. of lights Anti-grease filters Aluminium Charcoal filters included Yes Light type **LED Light Power** 1 W 150 mm Vent outlet 750 mm

Light color temperature 4000 °K Minimum distance from

GAS hob scale (°K)

Free outlet maximum 595 m<sup>3</sup>/h Minimum distance from 650 mm

**ELECTRIC hob** capacity

200 W Non return valve Motor power Yes

No. of filters 3

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	328	50



Speed 2	420	57
Speed 3	588	65

### Performance / Energy Label

	-	A
≺		Ď

54 kWh/a Airbourne acouistical A- 50 dBA **Annual Efficiency** Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 25.3 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Time increase factor (F) 1.1 Lighting Efficiency (LE) 74.3 lux/W **Energy Efficiency Index** 61.2 Lighting Efficiency Class A Measured air flow rate 318 m<sup>3</sup>/h (LEC) at best efficiency point **Grease Filtering** 70.8 % (Qbep) Efficiency (GFE) Measured air pressure 375 Pa **Grease Filtering** at best efficiency point Efficiency Class (GFEC) (Pbep) Air flow at minumum 328 m<sup>3</sup>/h Measured electric 131 W speed (Qmin) power input at best Air flow at maximum 588 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 164 lux the light on the cooking surface (Emiddle) Sound power level at 65 dBA

#### **Electrical Connection**

Plug Not present Frequency (Hz) 50-60 Hz
Electrical connection 202 W Power supply cable 1000 mm rating length

220-240 V


#### Also available

Voltage

Alternative colours Black, Stainless steel, Available colours KSED95NEE - KSED95XE - availible Cream, Red Wine KSED95PE - KSED95RWE

highest setting (Lwa)



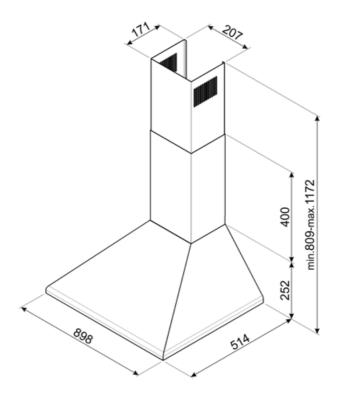



### Not included accessories

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



## Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

B #