

# KSED95BL

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709340148
Hood width	90 cm



## Aesthetics

Aesthetic Colour	Universale Black	Finishing Logo	Black Silk screen
------------------	------------------	----------------	-------------------

## Controls

Control setting	Slider
-----------------	--------


## Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	595 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	328	50
Speed 2	420	57

Speed 3	588	65
------------	-----	----

## Performance / Energy Label


			
Annual Efficiency Consumption (AEC <sub>hood</sub> )	54 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE <sub>min</sub> )	50 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE <sub>max</sub> )	65 dBA
Fluid Dynamic Efficiency (FDE)	25,3	Time increase factor (F)	1,1
Fluid Dynamic Efficiency class (FDEC)	B	Energy Efficiency Index	61,2
Lighting Efficiency (LE)	74 lux/W	Measured air flow rate at best efficiency point (Q <sub>bep</sub> )	318.4 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (P <sub>bep</sub> )	375 Pa
Grease Filtering Efficiency (GFE)	70,8 %	Measured electric power input at best efficiency point (W <sub>bep</sub> )	131 W
Grease Filtering Efficiency Class (GFEC)	D	Nominal Power consumption of the light system (WL)	2.2 W
Air flow at minumum speed (Q <sub>min</sub> )	328 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (E <sub>middle</sub> )	164 lux
Air flow at maximum speed (Q <sub>max</sub> )	588 m <sup>3</sup> /h	Sound power level at highest setting (L <sub>wa</sub> )	65 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	202 W	Power supply cable length	1000 mm
Voltage	220-240 V		

## Also available

Alternative colours available	Stainless steel, Anthracite, Red Wine	Available colours	KSED95XE - KSED95AE - KSED95RWE
-------------------------------	---------------------------------------	-------------------	---------------------------------

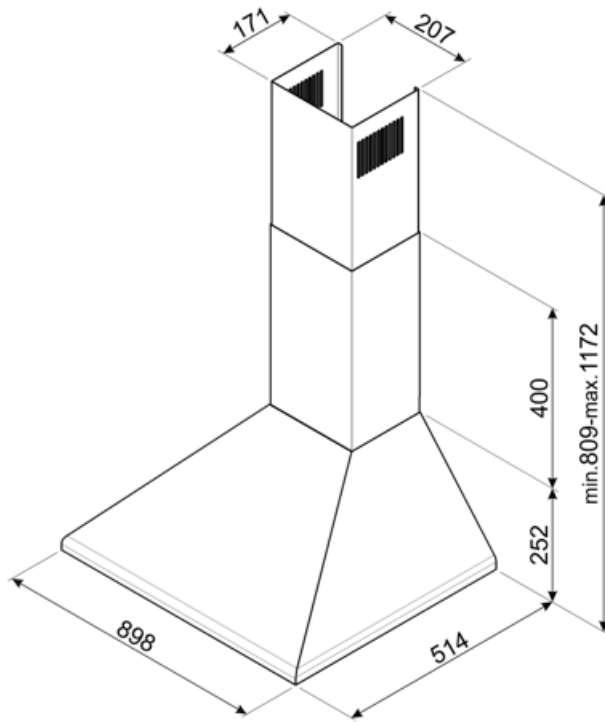

---

## Not included accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

