

KSED95BL

| | |
|-----------------------|----------------------|
| Product family | Hood |
| Hood Type | Decorative wall hood |
| Design | Chimney |
| Extraction | Extraction |
| Material | Painted material |
| Type of steel | Brushed |
| EAN code | 8017709340148 |
| Hood width | 90 cm |



Aesthetics

| | | | |
|------------------|----------|------------------|-------------|
| Aesthetic | Victoria | Finishing | Black |
| Colour | Black | Logo | Silk screen |

Controls

| | |
|------------------------|--------|
| Control setting | Slider |
|------------------------|--------|

Programme / Functions

| | |
|----------------------|---|
| No. of speeds | 3 |
|----------------------|---|

Technical Features



| | | | |
|-------------------------------------------|-----------------------|-------------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 3 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 1 W | Vent outlet | 150 mm |
| Light color temperature scale (°K) | 4000 °K | Minimum distance from GAS hob | 750 mm |
| Free outlet maximum capacity | 595 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 200 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dB(A)] |
|---------|-----------------------------------------------|------------------------------------|
| Speed 1 | 328 | 50 |
| Speed 2 | 420 | 57 |
| Speed 3 | 588 | 65 |

Performance / Energy Label

| | | | | |
|----------|------------------------------------------|-----------------------|--------------------------------------------------------------------------------|-------------------------|
| B | Annual Efficiency Consumption (AEChood) | 54 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dB(A) |
| | Energy efficiency class (EEC) | B | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 65 dB(A) |
| | Fluid Dynamic Efficiency (FDE) | 25,3 | Time increase factor (F) | 1,1 |
| | Fluid Dynamic Efficiency class (FDEC) | B | Energy Efficiency Index | 61,2 |
| | Lighting Efficiency (LE) | 74 lux/W | Measured air flow rate at best efficiency point (Qbep) | 318.4 m ³ /h |
| | Lighting Efficiency Class (LEC) | A | Measured air pressure at best efficiency point (Pbep) | 375 Pa |
| | Grease Filtering Efficiency (GFE) | 70,8 % | Measured electric power input at best efficiency point (Wbep) | 131 W |
| | Grease Filtering Efficiency Class (GFEC) | D | Nominal Power consumption of the light system (WL) | 2.2 W |
| | Air flow at minumum speed (Qmin) | 328 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 164 lux |
| | Air flow at maximum speed (Qmax) | 588 m ³ /h | Sound power level at highest setting (Lwa) | 65 dB(A) |

Electrical Connection

| | | | |
|------------------------------|-------------|---------------------------|----------|
| Plug | Not present | Frequency (Hz) | 50-60 Hz |
| Electrical connection rating | 202 W | Power supply cable length | 1000 mm |
| Voltage | 220-240 V | | |


Also available

Alternative colours available

Stainless steel, Anthracite, Red Wine

Available colours

KSED95XE - KSED95AE - KSED95RWE

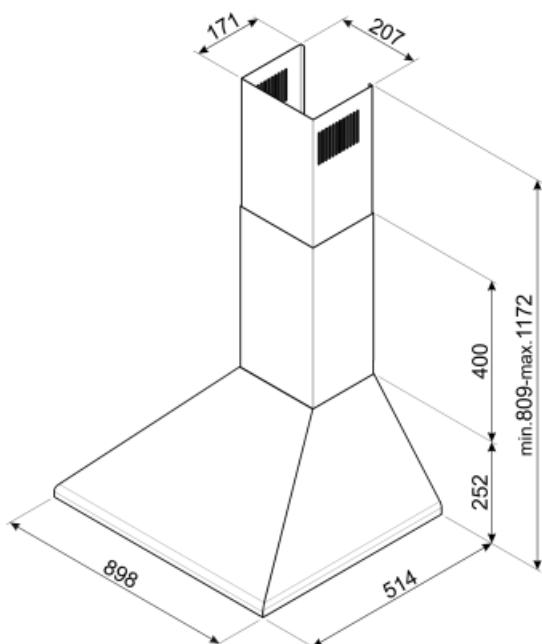

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



B: Product energy rating, measured from A+++ to D / G depending on the product family.