

KSED95COA

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Painted material
Type of steel Brushed

EAN code 8017709308803

AestheticColonialeColourAnthraciteSerigraphy colourAntique brassLogoSilk screen



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 °KMinimum distance from750 mm

scale (°K) GAS hob

Free outlet maximum 595 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	328	50
Speed 2	420	57



Speed 588	65
-----------	----

Performance / Energy Label

/	_	K
		Ť

Annual Efficiency 54 kWh/a Airbourne acouistical A- 50 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 25,3 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Time increase factor (F) 1,1 Lighting Efficiency (LE) 74,3 lux/W **Energy Efficiency Index** 61,2 Lighting Efficiency Class A Measured air flow rate 318 m³/h (LEC) at best efficiency point **Grease Filtering** 70.8 % (Qbep) Efficiency (GFE) Measured air pressure 375 Pa **Grease Filtering** D at best efficiency point **Efficiency Class (GFEC)** (Pbep) Air flow at minumum 328 m³/h Measured electric 131 W speed (Qmin) power input at best Air flow at maximum 588 m³/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 164 lux the light on the cooking surface (Emiddle)

Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz
Voltage 220-240 V Power supply cable 1000 mm length

Sound power level at


highest setting (Lwa)

65 dBA

Also available

Alternative colours Cream Available colours KSED95COP availible



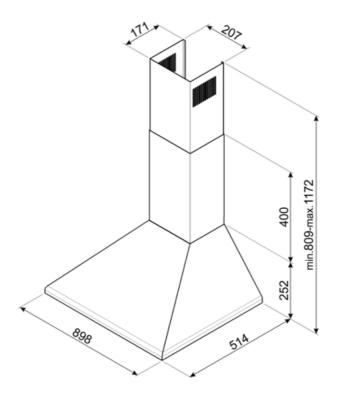



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.