

# KSED95PE

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709206093
Hood width	90 cm
Aesthetic	Universale
Colour	Cream
Logo	Embossed



## Controls

Control setting	Slider
-----------------	--------

## Program / Functions

No. of speeds	3
---------------	---

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	595 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	328	50
Speed 2	420	57

Speed 3	588	65
---------	-----	----

## Performance / Energy Label


	<b>Annual Efficiency Consumption (AEChood)</b>	54 kWh/a	<b>Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)</b>	50 dBA
	<b>Energy efficiency class ( EEC)</b>	B	<b>Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)</b>	65 dBA
	<b>Fluid Dynamic Efficiency (FDE)</b>	25,3	<b>Time increase factor (F)</b>	1,1
	<b>Fluid Dynamic Efficiency class (FDEC)</b>	B	<b>Energy Efficiency Index</b>	61,2
	<b>Lighting Efficiency (LE)</b>	74,3 lux/W	<b>Measured air flow rate at best efficiency point (Qbep)</b>	318 m <sup>3</sup> /h
	<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air pressure at best efficiency point (Pbep)</b>	375 Pa
	<b>Grease Filtering Efficiency (GFE)</b>	70,8 %	<b>Measured electric power input at best efficiency point (Wbep)</b>	131 W
	<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Nominal Power consumption of the light system (WL)</b>	2 W
	<b>Air flow at minimum speed (Qmin)</b>	328 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	164 lux
	<b>Air flow at maximum speed (Qmax)</b>	588 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	65 dBA

## Electrical Connection

<b>Electrical connection rating</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

<b>Alternative colours available</b>	Black, Stainless steel, Anthracite, Red Wine	<b>Available colours</b>	KSED95NEE - KSED95XE - KSED95AE - KSED95RWE
--------------------------------------	--	--------------------------	---

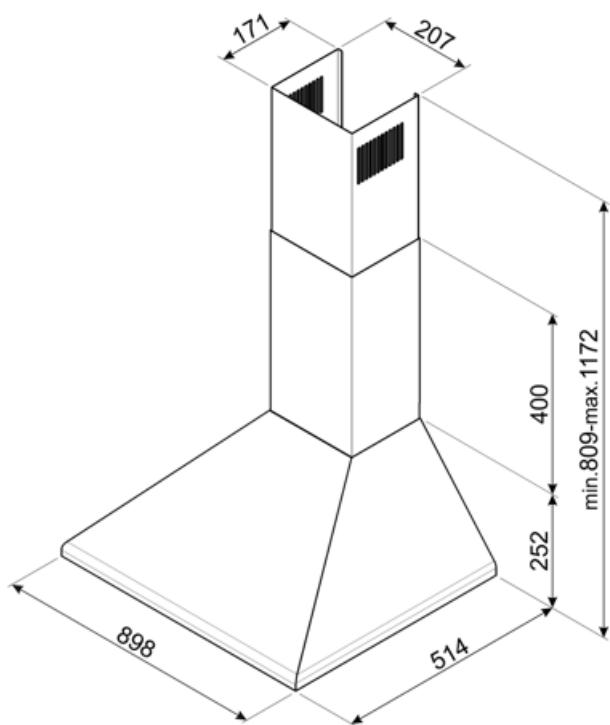

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**A<sup>a</sup>  
B<sup>b</sup>**



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.