

KSED95WH

| | |
|----------------|----------------------|
| Product family | Hood |
| Hood Type | Decorative wall hood |
| Design | Chimney |
| Extraction | Extraction |
| Material | Painted material |
| Type of steel | Brushed |
| EAN code | 8017709340155 |
| Hood width | 90 cm |
| Aesthetic | Victoria |
| Colour | Black |
| Finishing | White |
| Logo | Silk screen |



Controls

| | |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

Program / Functions

| | |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

Technical Features



| | | | |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 3 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 1 W | Vent outlet | 150 mm |
| Light color temperature scale (K) | 4000 K | Minimum distance from GAS hob | 750 mm |
| Free outlet maximum capacity | 595 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 200 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 328 | 50 |
| Speed 2 | 420 | 57 |

| | | |
|------------|-----|----|
| Speed 3 | 588 | 65 |
|------------|-----|----|

Performance / Energy Label


| | | | |
|--|-----------------------|---|-------------------------|
|  | | | |
| Annual Efficiency Consumption (AEC _{hood}) | 54 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE _{min}) | 50 dBA |
| Energy efficiency class (EEC) | B | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE _{max}) | 65 dBA |
| Fluid Dynamic Efficiency (FDE) | 25.3 | Time increase factor (F) | 1.1 |
| Fluid Dynamic Efficiency class (FDEC) | B | Energy Efficiency Index | 61.2 |
| Lighting Efficiency (LE) | 74.3 lux/W | Measured air flow rate at best efficiency point (Q _{bep}) | 318.4 m ³ /h |
| Lighting Efficiency Class (LEC) | A | Measured air pressure at best efficiency point (P _{bep}) | 375 Pa |
| Grease Filtering Efficiency (GFE) | 70.8 % | Measured electric power input at best efficiency point (W _{bep}) | 131 W |
| Grease Filtering Efficiency Class (GFEC) | D | Nominal Power consumption of the light system (WL) | 2.2 W |
| Air flow at minumum speed (Q _{min}) | 328 m ³ /h | Average illumination of the light on the cooking surface (E _{middle}) | 164 lux |
| Air flow at maximum speed (Q _{max}) | 588 m ³ /h | Sound power level at highest setting (L _{wa}) | 65 dBA |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 202 W | Power supply cable length | 1000 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

Also available

| | | | |
|-------------------------------|---------------------------------------|-------------------|---------------------------------|
| Alternative colours available | Stainless steel, Anthracite, Red Wine | Available colours | KSED95XE - KSED95AE - KSED95RWE |
|-------------------------------|---------------------------------------|-------------------|---------------------------------|

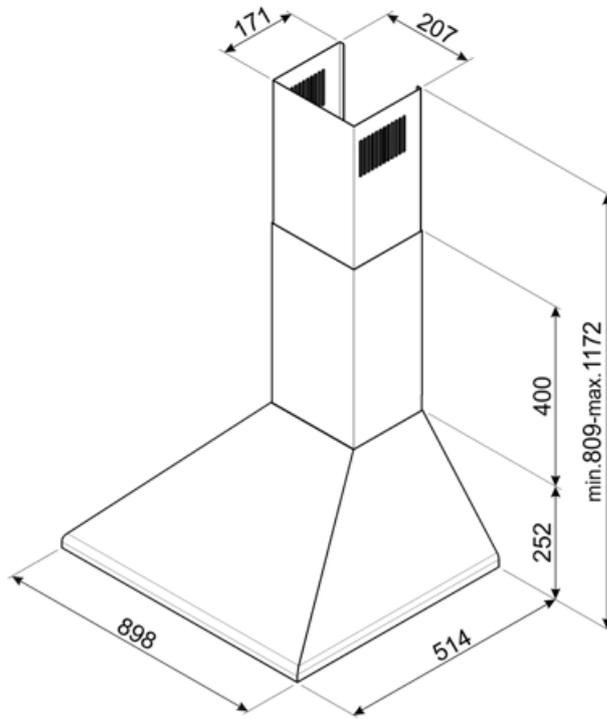

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.