

# KSED95XE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Chimney
Extraction	Ducted out or re-circulation possible
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709206109
Hood width	90 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



## Controls

Control setting	Slider
-----------------	--------

## Program / Functions

No. of speeds	3
---------------	---

## Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	1 W	Vent outlet	150 mm
Light colour temperature scale (K)	4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	595 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	328	50
Speed 2	420	57

Speed 3	588	65
------------	-----	----

## Performance / Energy Label




<b>Annual Efficiency Consumption (AEChood)</b>	54 kWh/year	<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	50 dBA
<b>Energy efficiency class (EEC)</b>	B	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	65 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	25,3	<b>Time increase factor (F)</b>	1,1
<b>Fluid Dynamic Efficiency class (FDEC)</b>	B	<b>Energy Efficiency Index per first cavity</b>	61,2
<b>Lighting Efficiency (LE)</b>	74,3 lux/W	<b>Measured air flow rate at best efficiency point (Qbep)</b>	318 m <sup>3</sup> /h
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air pressure at best efficiency point (Qbep)</b>	375 Pa
<b>Grease Filtering Efficiency (GFE)</b>	70,8 %	<b>Measured electric power input at best efficiency point (Wbep)</b>	131 W
<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Normal Power of the light system (WI)</b>	2 W
<b>Air flow at minumum speed (Qmin)</b>	328 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	164 lux
<b>Maximum extraction rate</b>	588 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	65 dBA

## Electrical Connection

<b>Nominal power</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	No
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

<b>Alternative colours available</b>	Black, Anthracite, Cream, Red Wine	<b>Available colours</b>	KSED95NEE - KSED95AE - KSED95PE - KSED95RWE
--------------------------------------	------------------------------------	--------------------------	---

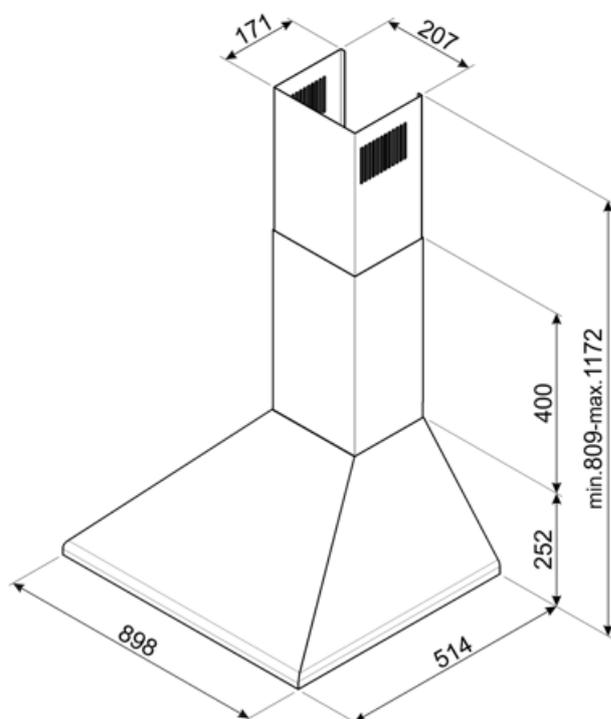

---

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.