

## KSED95XE

### Product family

Hood

### Hood Type

Decorative wall hood

### Design

Chimney

### Extraction

Extraction

### Material

Stainless steel

### Type of steel

Brushed

### EAN code

8017709206109

### Hood width

90 cm

### Aesthetic

Universale

### Colour

Stainless steel

### Finishing

Satin

### Logo

Embossed



## Controls

### Control setting

Slider

## Program / Functions

### No. of speeds

3

## Technical Features



### No. of lights

2

### No. of filters

3

### Light type

LED

### Anti-grease filters

Aluminium

### Light Power

1 W

### Vent outlet

150 mm

### Light color temperature scale (K)

4000 K

### Minimum distance from GAS hob

750 mm

### Free outlet maximum capacity

595 m<sup>3</sup>/h

### Minimum distance from ELECTRIC hob

650 mm

### Motor power

200 W

### Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	328	50
Speed 2	420	57

Speed 3	588	65
---------	-----	----

## Performance / Energy Label




<b>Annual Efficiency Consumption (AEChood)</b>	54 kWh/a	<b>Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)</b>	50 dBA
<b>Energy efficiency class ( EEC)</b>	B	<b>Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)</b>	65 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	25,3	<b>Time increase factor (F)</b>	1,1
<b>Fluid Dynamic Efficiency class (FDEC)</b>	B	<b>Energy Efficiency Index</b>	61,2
<b>Lighting Efficiency (LE)</b>	74,3 lux/W	<b>Measured air flow rate at best efficiency point (Qbep)</b>	318 m <sup>3</sup> /h
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air pressure at best efficiency point (Pbep)</b>	375 Pa
<b>Grease Filtering Efficiency (GFE)</b>	70,8 %	<b>Measured electric power input at best efficiency point (Wbep)</b>	131 W
<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Nominal Power consumption of the light system (WL)</b>	2 W
<b>Air flow at minimum speed (Qmin)</b>	328 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	164 lux
<b>Air flow at maximum speed (Qmax)</b>	588 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	65 dBA

## Electrical Connection

<b>Electrical connection rating</b>	202 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

**Alternative colours available** Black, Anthracite, Cream, Red Wine **Available colours** KSED95NEE - KSED95AE - KSED95PE - KSED95RWE

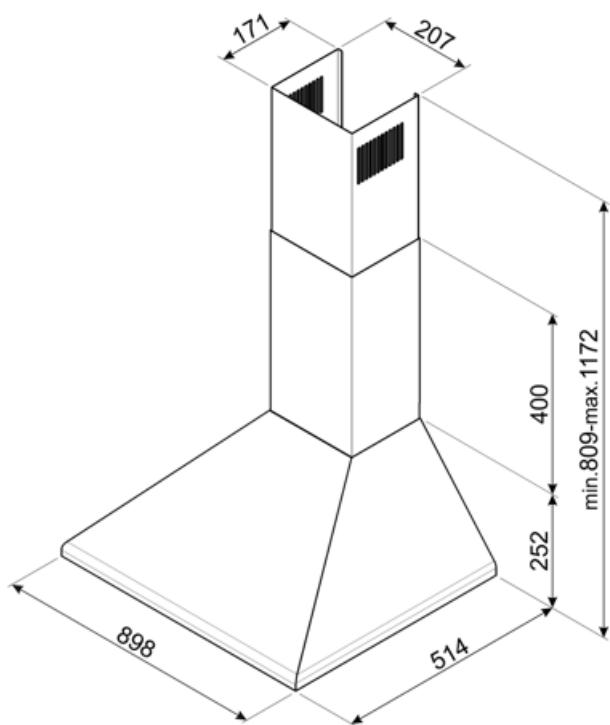

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**A<sup>a</sup>  
B<sup>b</sup>**



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.