

# KSEG58PXE



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224912
Hood width	54 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Light colour temperature scale (K)	4000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	673 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	275 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46

Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68


## Performance / Energy Label



<b>Annual Efficiency Consumption (AEChood)</b>	46 kWh/year	<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	46 dBA
<b>Energy efficiency class (EEC)</b>	A	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	65 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	31,7	<b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b>	68 dBA
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Time increase factor (F)</b>	0,9
<b>Lighting Efficiency (LE)</b>	111,8 lux/W	<b>Energy Efficiency Index per first cavity</b>	50,7
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air flow rate at best efficiency point (Qbep)</b>	329 m <sup>3</sup> /h
<b>Grease Filtering Efficiency (GFE)</b>	56,9 %	<b>Measured air pressure at best efficiency point (Qbep)</b>	466 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	E	<b>Measured electric power input at best efficiency point (Wbep)</b>	134 W
<b>Air flow at minumum speed (Qmin)</b>	261 m <sup>3</sup> /h	<b>Normal Power of the light system (WI)</b>	2 W
<b>Maximum extraction rate</b>	606 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	246 lux
<b>Intensive extraction rate</b>	683 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	65 dBA

## Electrical Connection

<b>Nominal power</b>	277 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	No
<b>Frequency (Hz)</b>	50-60 Hz		

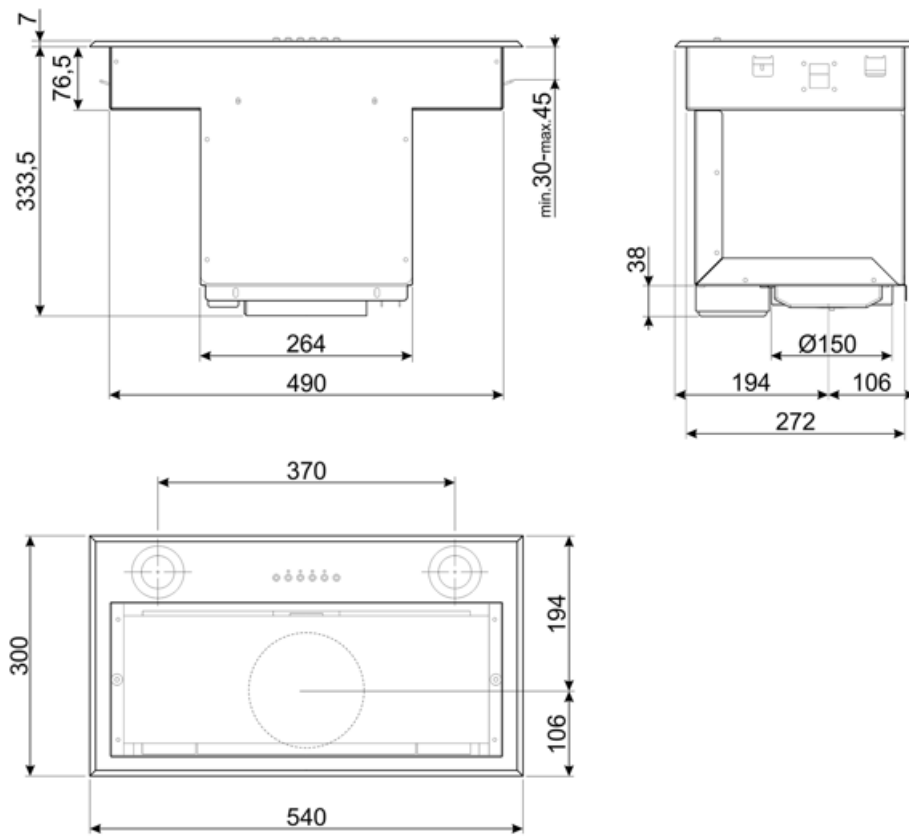

---

## Compatible Accessories

---










**FLT4**

Charcoal filter Kit 1 piece

---

## Symbols glossary

---

- |                                                                                  |                                                                                                               |                                                                                   |                                                                                                                                    |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.       |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family                    |  | Warning light(s): to advise when filters need changing.                                                                            |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction.                                                               |
|  | Intensive/turbo setting: when extra fast extraction is required.                                              |                                                                                   |                                                                                                                                    |