KSEG58PXE



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224912
Hood width	54 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed

Controls

Control setting	Electronic buttons	**Led colour**	White

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Time-setting options	

Technical Features

No. of lights	2	**Anti-grease filters**	Aluminium
Light type	LED	**Filter replacement indicator**	Yes
Light power	1 W	**Vent outlet**	150 mm
Light colour temperature scale (K)	4000 K	**Minimum distance from GAS hob**	750 mm
Free outlet maximum capacity	673 m³/h	**Minimum distance from ELECTRIC hob**	500 mm
Motor power	275 W	**Non return valve**	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46

Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	46 kWh/year
Energy efficiency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	31,7
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	111,8 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	56,9 %
Grease Filtering Efficiency Class (GFEC)	E
Air flow at minumum speed (Qmin)	261 m³/h
Maximum extraction rate	606 m³/h
Intensive extraction rate	683 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Time increase factor (F)	0,9
Energy Efficiency Index per first cavity	50,7
Measured air flow rate at best efficiency point (Qbep)	329 m³/h
Measured air pressure at best efficiency point (Qbep)	466 Pa
Measured electric power input at best efficiency point (Wbep)	134 W
Normal Power of the light system (WI)	2 W
Average illumination of the light on the cooking surface (Emiddle)	246 lux
Sound power level at highest setting (Lwa)	65 dBA


Electrical Connection

Nominal power	277 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz

Power supply cable length	1500 mm
Plug	No

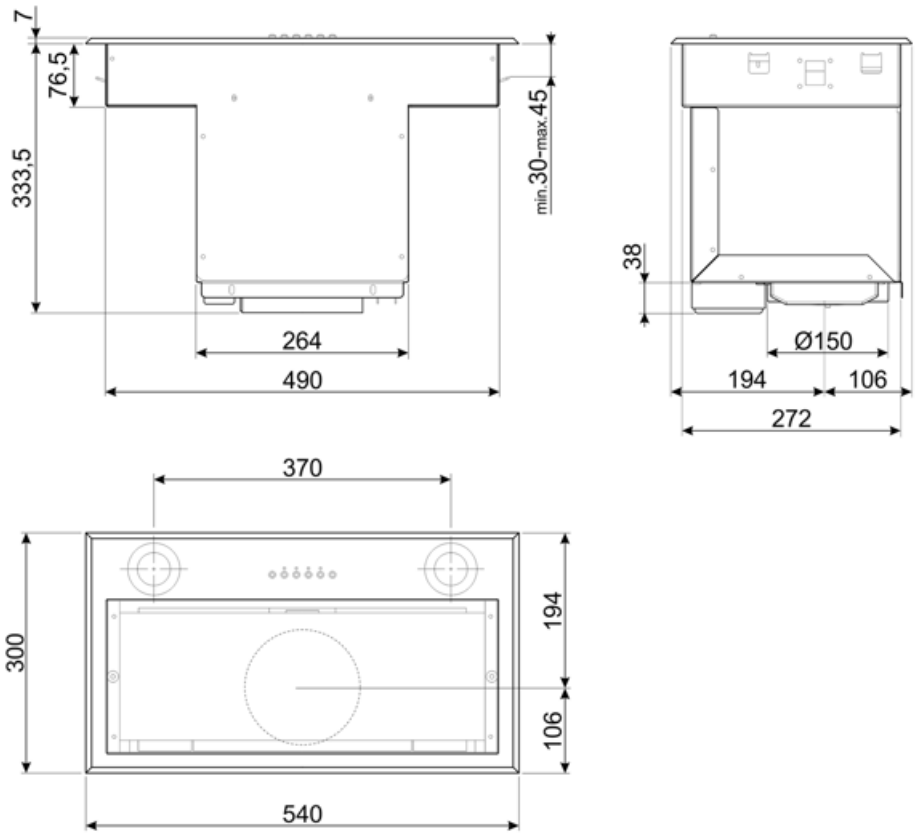
7
76,5
333,5
min.30-max.45
264
490
38
Ø150
194
106
272
370
300
194
106
540

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.