

# KSEG58PXE




|                      |                                       |
|----------------------|---------------------------------------|
| Product family       | Hood                                  |
| Hood Type            | Canopy Cooker Hoods                   |
| Design               | Fully integrated                      |
| Extraction           | Ducted out or re-circulation possible |
| Electronic control   | Yes                                   |
| Perimeter extraction | Yes                                   |
| Material             | Stainless steel                       |
| Type of steel        | Brushed                               |
| EAN code             | 8017709224912                         |
| Aesthetics           | Universal                             |
| Colour               | Stainless steel                       |
| Finishing            | Brushed                               |
| Logo                 | Embossed                              |






## Controls

|                 |                    |            |       |
|-----------------|--------------------|------------|-------|
| Control setting | Electronic buttons | Led colour | White |
|-----------------|--------------------|------------|-------|

## Program / Functions

|                      |   |
|----------------------|---|
| No. of speeds        | 3   |
| Intensive speed      |  |
| Time-setting options |  |

## Technical Features

|  |   |   |           |  |
|--|---|---|-----------|--|
|  |  |  |           |  |
| No. of lights  | 2   | Anti-grease filters   | Aluminium |  |
| Light type   | LED   | Filter replacement indicator  | Yes       |  |
| Light power  | 1 W   | Vent outlet   | 150 mm    |  |
| Light colour   | 4000 °K   | Minimum distance from GAS hob   | 750 mm    |  |
| temperature scale (°K)   |   | Minimum distance from ELECTRIC hob  | 500 mm    |  |
| Free outlet maximum capacity   | 673 m³/h  | Non return valve  | Yes       |  |
| Motor power  | 275 W   |   |           |  |
| No. of filters   | 2   |   |           |  |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 261                              | 46                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 2         | 436 | 58 |
| Speed 3         | 606 | 65 |
| Intensive speed | 683 | 68 |

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 46 KWh/year

**Energy efficiency class (EEC)** A

**Fluid Dynamic Efficiency (FDE)** 31,7

**Fluid Dynamic Efficiency class (FDEC)** A

**Lighting Efficiency (LE)** 111,8 lux/W

**Lighting Efficiency Class (LEC)** A

**Grease Filtering Efficiency (GFE)** 56,9 %

**Grease Filtering Efficiency Class (GFEC)** E

**Air flow at mininum speed (Qmin)** 261 m³/h

**Maximum extraction rate** 606 m³/h

**Intensive extraction rate** 683 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 46 dBA

**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 65 dBA

**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 68 dBA

**Power consumption in stand-by mode (Ps)** 0,49 W

**Time increase factor (F)** 0,9

**Energy Efficiency Index per first cavity** 50,7

**Measured air flow rate at best efficiency point (Qbep)** 329 m³/h

**Measured air pressure at best efficiency point (Qbep)** 466 Pa

**Measured electric power input at best efficiency point (Wbep)** 134 W

**Normal Power of the light system (WI)** 2 W

**Average illumination of the light on the cooking surface (Emiddle)** 246 lux

**Sound power level at highest setting (Lwa)** 65 dBA


## Electrical Connection

**Nominal power** 277 W

**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz


**Power supply cable length** 1500 mm

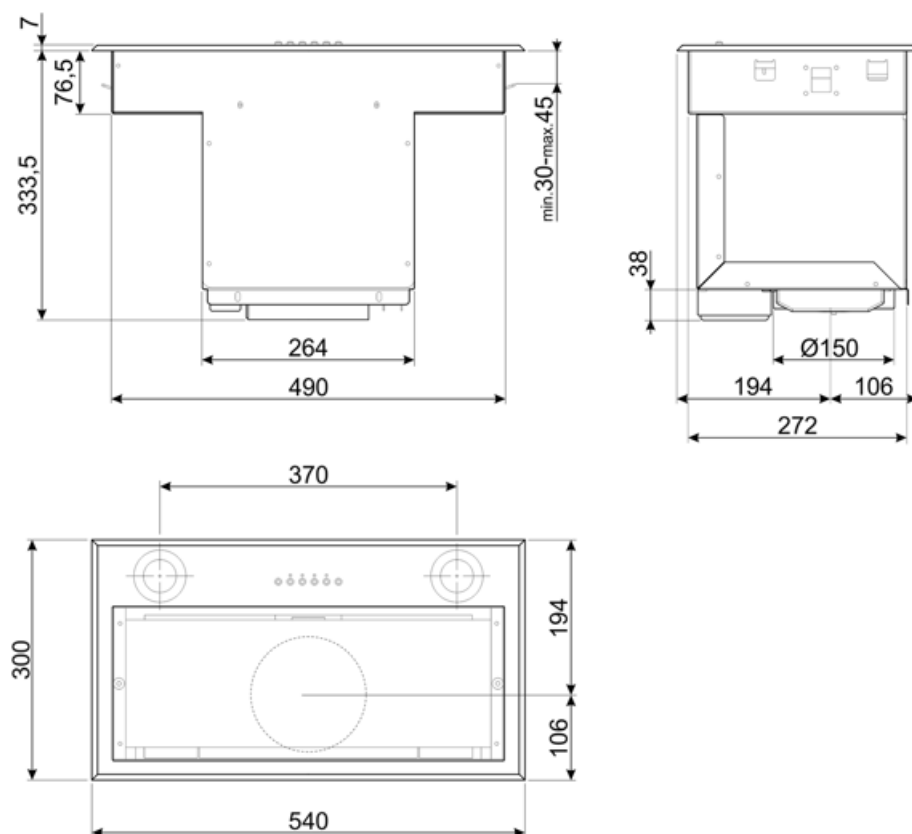

---

## Compatible Accessories

---










**FLT4**

Charcoal filter Kit 1 piece

---

## Symbols glossary

---

|  |  |   |   |
|--|--|---|---|
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family   |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | Warning light(s): to advise when filters need changing.   |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |  | Perimeter extraction panels: very efficient and aid noise reduction.                                    |
|  | Intensive/turbo setting: when extra fast extraction is required.   |   |   |

---

## Benefit

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones