

KSEG58PXE



Product family Hood

Hood TypeIntegrated hoodDesignFully integratedExtractionExtraction

Electronic control Yes
Perimeter extraction Yes

MaterialStainless steelType of steelBrushed

EAN code 8017709224912

Hood width54 cmAestheticUniversaleColourStainless steel

Finishing Satin
Logo Embossed



Controls

Control setting Electronic buttons Led color White

Program / Functions

No. of speeds Intensive speed

Time-setting options





Technical Features







No. of lights 2 Light type LED Light Power 1 W Light color temperature 4000 K

scale (K)

Free outlet maximum 673 m³/h

capacity

Motor power 275 W No. of filters 2 Anti-grease filters Aluminium
Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 750 mm

500 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve Yes

		Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
:	Speed 1	261	46



Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

Performance / Energy Label

	A****
	7
	Ď

Annual Efficiency 46 kWh/a Airbourne acouistical A- 46 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 31,7 weighted sound Power (FDE) Emission at maximum Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 68 dBA Lighting Efficiency (LE) 111.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 56,9 % Time increase factor (F) 0,9 Efficiency (GFE) **Energy Efficiency Index** 50,7 **Grease Filtering** F Measured air flow rate 329 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 261 m³/h (Qbep) speed (Qmin) Measured air pressure 466 Pa 606 m³/h Air flow at maximum at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 683 m³/h Measured electric 134 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 246 lux the light on the cooking

Electrical Connection

Electrical connection 277 W Power supply cable length

Voltage 220-240 V Plug Not present

Frequency (Hz) 50-60 Hz


SMEG SPA 12/12/2025


surface (Emiddle) Sound power level at

highest setting (Lwa)

65 dBA



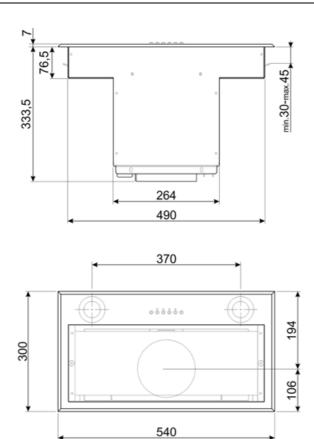





Compatible Accessories



FLT4
Charcoal filter Kit 1 piece



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.