

# KSEG58PXE



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224912
Hood width	54 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features





<b>No. of lights</b>	2	<b>Anti-grease filters</b>	Aluminium
<b>Light type</b>	LED	<b>Filter replacement indicator</b>	Yes
<b>Light Power</b>	1 W	<b>Vent outlet</b>	150 mm
<b>Light color temperature scale (K)</b>	4000 K	<b>Minimum distance from GAS hob</b>	750 mm
<b>Free outlet maximum capacity</b>	673 m³/h	<b>Minimum distance from ELECTRIC hob</b>	500 mm
<b>Motor power</b>	275 W	<b>Non return valve</b>	Yes
<b>No. of filters</b>	2		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46

Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

## Performance / Energy Label




**Annual Efficiency Consumption (AEChood)** 46 kWh/a  
**Energy efficiency class (EEC)** A  
**Fluid Dynamic Efficiency (FDE)** 31,7  
**Fluid Dynamic Efficiency class (FDEC)** A  
**Lighting Efficiency (LE)** 111,8 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 56,9 %  
**Grease Filtering Efficiency Class (GFEC)** E  
**Air flow at minumum speed (Qmin)** 261 m³/h  
**Air flow at maximum speed (Qmax)** 606 m³/h  
**Air flow at boost speed (Qboost)** 683 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 46 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 65 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 68 dBA  
**Time increase factor (F)** 0,9  
**Energy Efficiency Index** 50,7  
**Measured air flow rate at best efficiency point (Qbep)** 329 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 466 Pa  
**Measured electric power input at best efficiency point (Wbep)** 134 W  
**Nominal Power consumption of the light system (WL)** 2 W  
**Average illumination of the light on the cooking surface (Emiddle)** 246 lux  
**Sound power level at highest setting (Lwa)** 65 dBA

## Electrical Connection


**Electrical connection rating** 277 W  
**Voltage** 220-240 V  
**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm  
**Plug** Not present

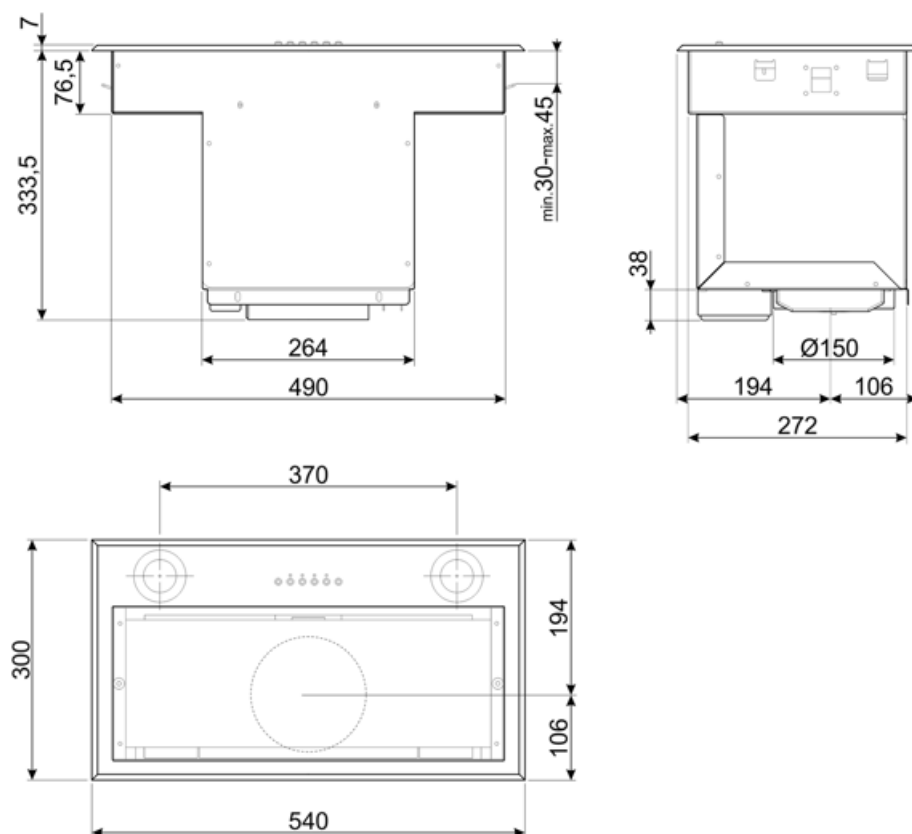

---

## Compatible Accessories

---



**FLT4**

Charcoal filter Kit 1 piece

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Energy efficiency class A**



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Perimeter extraction panels:** very efficient and aid noise reduction.