

# KSEG5XE

Product family Hood

Hood Type Integrated hood
Design Fully integrated
Extraction Extraction
Material Stainless steel
Type of steel Brushed

**EAN code** 8017709203337

Hood width52 cmAestheticUniversaleColourStainless steel

Finishing Satin
Serigraphy colour Black
Logo Silk screen



### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

#### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power4 WVent outlet150 mmFree outlet maximum520 m³/hMinimum distance from650 mm

capacity GAS hob

Motor power 205 W Minimum distance from 650 mm

**ELECTRIC hob** 

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	250	52
Speed 2	340	59
Speed 3	505	69



#### Accessories Included

Tube reduction Yes

### Performance / Energy Label

4	$\overline{}$	A

Annual Efficiency 91 kWh/a
Consumption (AEChood)
Energy efficiency class (EEC)
Fluid Dynamic Efficiency (FDE)
Fluid Dynamic Efficiency D
class (FDEC)
Lighting Efficiency (LE) 13 lux/W
Lighting Efficiency Class D
(LEC)

75.1 %

250 m<sup>3</sup>/h

505 m<sup>3</sup>/h

Grease Filtering 75
Efficiency (GFE)
Grease Filtering C
Efficiency Class (GFEC)

Air flow at minumum speed (Qmin)

Air flow at maximum speed (Qmax)

Airbourne acouistical A- 52 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical A- 69 dBA weighted sound Power Emission at maximum speed (SPEmax)

Time increase factor (F) 1.5

Measured air flow rate 300 m³/h
at best efficiency point

(Qbep)

Measured air pressure 245 Pa at best efficiency point

(Pbep)

Measured electric 155 W power input at best

efficiency point (Wbep)
Nominal Power

consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle) Sound power level at highest setting (Lwa)

69 dBA

100 lux

8 W

#### **Electrical Connection**

Plug Not present Electrical connection 213 W

rating

Voltage 220-240 V


Frequency (Hz)
Power supply cable length

50-60 Hz 1000 mm

## Optional accessories

Charcoal filter KITFC142 Non return valve KITVENT150



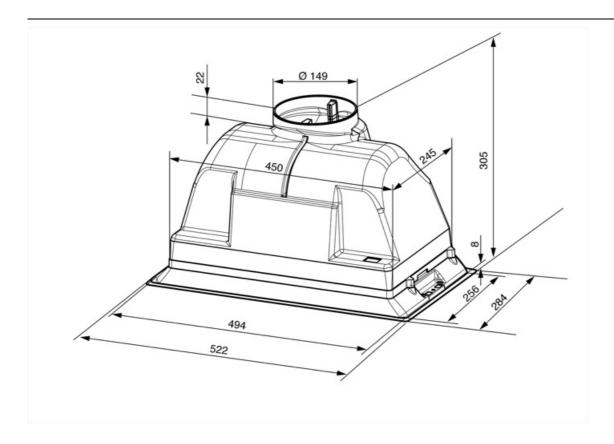



## **Compatible Accessories**

KITVEN150

No return valve diameter 150 mm



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.