

# KSEG78PXE



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224905
Hood width	77 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light power	1 W	Vent outlet	150 mm	
Light colour	4000 K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	673 m³/h	Minimum distance from ELECTRIC hob	500 mm	
Motor power	275 W	Non return valve	Yes	
No. of filters	2			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46

Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 46 kWh/year

**Energy efficiency class (EEC)** A

**Fluid Dynamic Efficiency (FDE)** 31.7

**Fluid Dynamic Efficiency class (FDEC)** A

**Lighting Efficiency (LE)** 111.8 lux/W

**Lighting Efficiency Class (LEC)** A

**Grease Filtering Efficiency (GFE)** 56.9 %

**Grease Filtering Efficiency Class (GFEC)** E

**Air flow at minumum speed (Qmin)** 261 m³/h

**Maximum extraction rate** 606 m³/h

**Intensive extraction rate** 683 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 46 dBA

**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 65 dBA

**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 68 dBA

**Time increase factor (F)** 0.9

**Measured air flow rate at best efficiency point (Qbep)** 329 m³/h

**Measured air pressure at best efficiency point (Qbep)** 466 Pa

**Measured electric power input at best efficiency point (Wbep)** 134 W

**Normal Power of the light system (WI)** 2 W


**Average illumination of the light on the cooking surface (Emiddle)** 246 lux

**Sound power level at highest setting (Lwa)** 65 dBA

## Electrical Connection

**Nominal power** 277 W  
**Voltage** 220-240 V


**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm

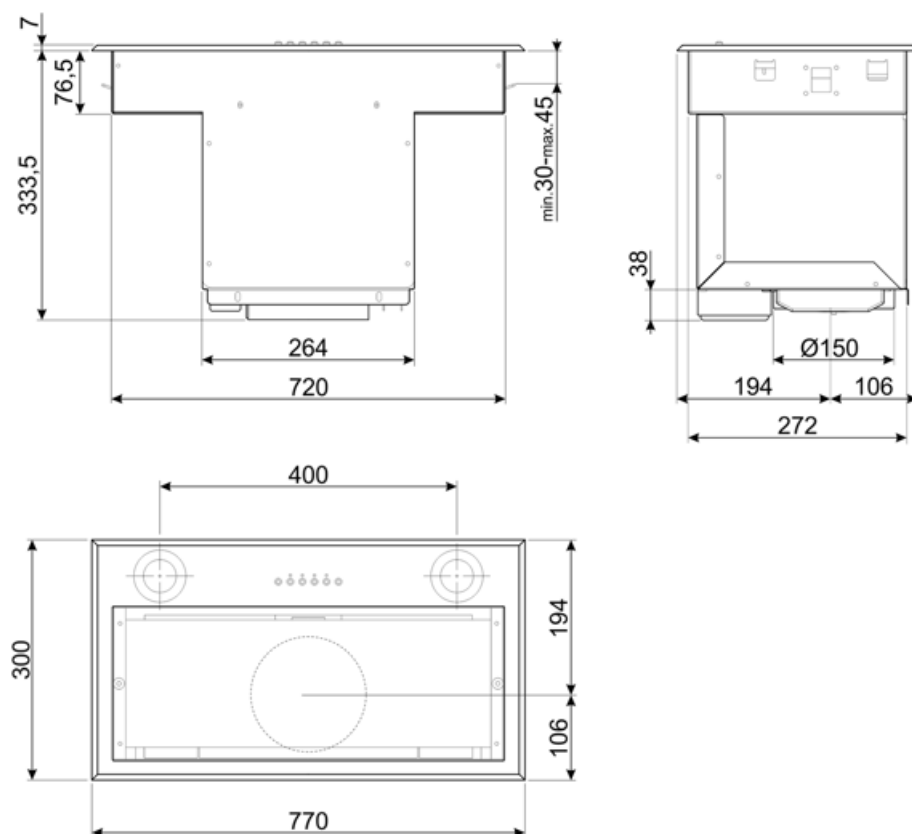

---

## Compatible Accessories

---



**FLT4**

Charcoal filter Kit 1 piece

## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.