

# KSEG78PXE



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224905
Hood width	77 cm



## Aesthetics

Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Embossed


## Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	673 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	275 W		

No. of filters 2 Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	261	46
Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68


## Performance / Energy Label

A

Annual Efficiency Consumption (AEChood)	46 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dB(A)
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Fluid Dynamic Efficiency (FDE)	31,7	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dB(A)
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0,49 W
Lighting Efficiency (LE)	111,8 lux/W	Time increase factor (F)	0,9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	329 m³/h
Grease Filtering Efficiency (GFE)	56,9 %	Measured air pressure at best efficiency point (Pbep)	466 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	134 W
Air flow at mininum speed (Qmin)	261 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	606 m³/h	Average illumination of the light on the cooking surface (Emiddle)	246 lux
Air flow at boost speed (Qboost)	683 m³/h	Sound power level at highest setting (Lwa)	65 dB(A)

## Electrical Connection


Electrical connection rating	277 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

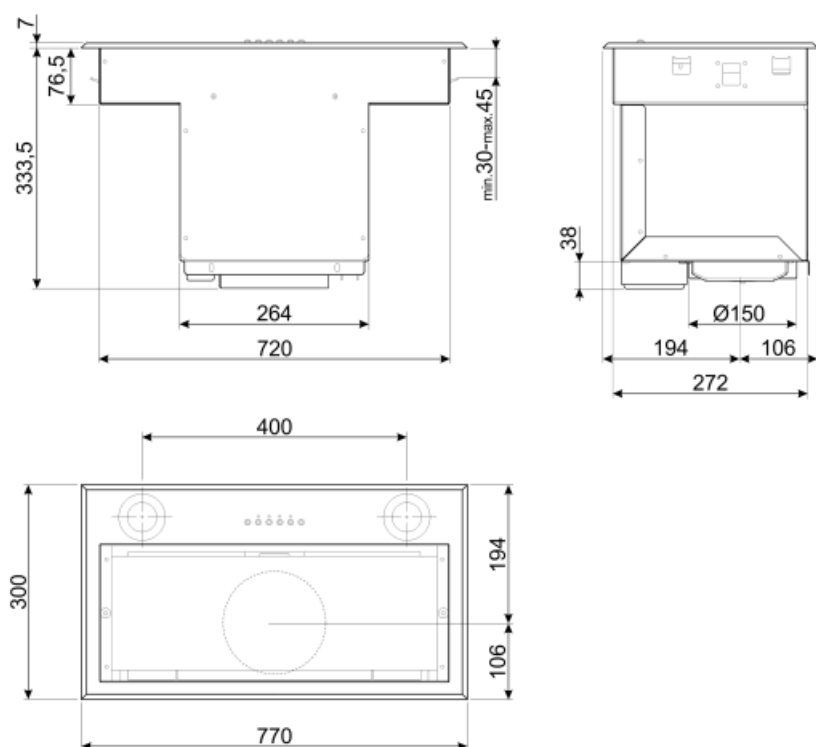

---

## Not included accessories








---



**FLT4**

Charcoal filter Kit 1 piece

## Symbols glossary (TT)

	A: Product drying performance, measured from A+++ to D / G depending on the product family		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Intensive/turbo setting: when extra fast extraction is required.		