

KSEG78PXE




Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224905
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed




Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1 W	Vent outlet	150 mm	
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	673 m³/h	Minimum distance from ELECTRIC hob	500 mm	
Motor power	275 W	Non return valve	Yes	
No. of filters	2			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46

Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 46 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 31,7

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 111,8 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 56,9 %

Grease Filtering Efficiency Class (GFEC) E

Air flow at minumum speed (Qmin) 261 m³/h

Air flow at maximum speed (Qmax) 606 m³/h

Air flow at boost speed (Qboost) 683 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 65 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 68 dBA

Time increase factor (F) 0,9

Measured air flow rate at best efficiency point (Qbep) 329 m³/h

Measured air pressure at best efficiency point (Pbep) 466 Pa

Measured electric power input at best efficiency point (Wbep) 134 W

Nominal Power consumption of the light system (WL) 2 W

Average illumination of the light on the cooking surface (Emiddle) 246 lux

Sound power level at highest setting (Lwa) 65 dBA

Electrical Connection


Plug Not present

Electrical connection rating 277 W


Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

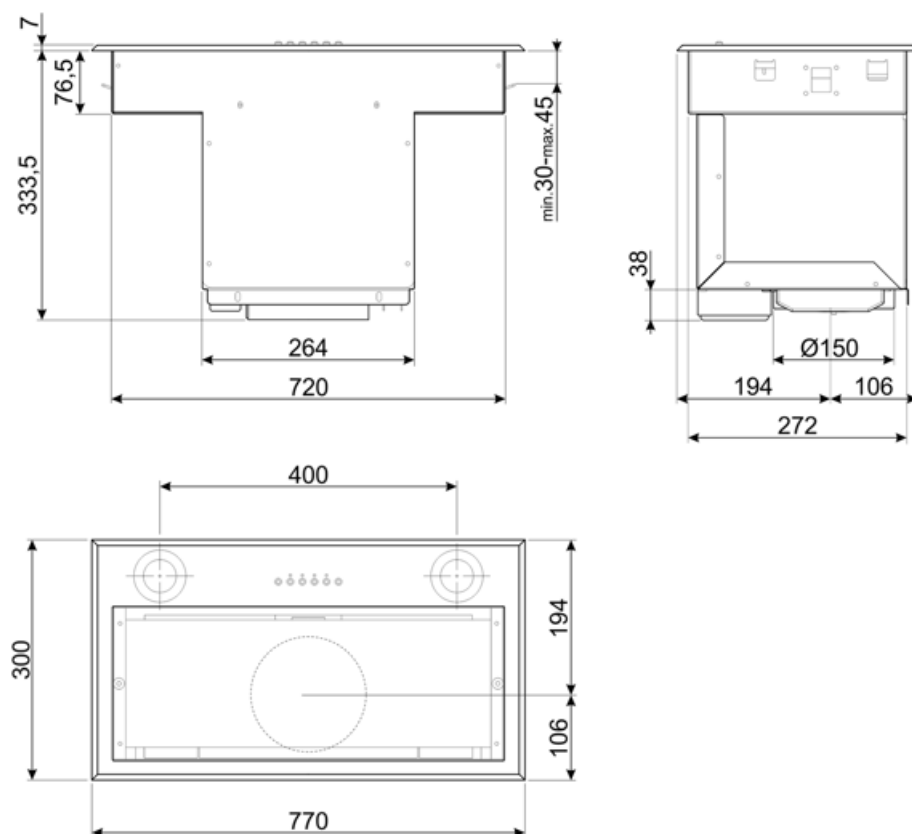

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.

Benefit (TT)

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture