

KSEG78PXE



Product family Hood

Integrated hood **Hood Type** Design Fully integrated Extraction Extraction

Electronic control Yes Perimeter extraction Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709224905

Hood width 77 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Logo **Embossed**



Controls

Electronic buttons Led color White Control setting

Program / Functions

No. of speeds Intensive speed

Time-setting options





Technical Features







No. of lights 2 **LED** Light type **Light Power** Light color temperature 4000 K

scale (K)

Free outlet maximum 673 m³/h

capacity

275 W Motor power No. of filters

Anti-grease filters Aluminium Filter replacement Yes

indicator

150 mm Vent outlet Minimum distance from 650 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

500 mm

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	261	46

SMEG SPA 12/6/2025



Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

Performance / Energy Label

_	tr
	7
	Ď

Annual Efficiency 46 kWh/a Airbourne acouistical A- 46 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 31,7 weighted sound Power (FDE) Emission at maximum Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 68 dBA Lighting Efficiency (LE) 111.8 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 56,9 % Time increase factor (F) 0,9 Efficiency (GFE) Measured air flow rate 329 m³/h **Grease Filtering** F at best efficiency point Efficiency Class (GFEC) (Qbep) Air flow at minumum 261 m³/h Measured air pressure 466 Pa speed (Qmin) at best efficiency point 606 m³/h Air flow at maximum (Pbep) speed (Qmax) Measured electric 134 W Air flow at boost speed 683 m³/h power input at best (Qboost) efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 246 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 277 W Power supply cable 1500 mm rating length

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz


SMEG SPA 12/6/2025

Sound power level at


highest setting (Lwa)

65 dBA



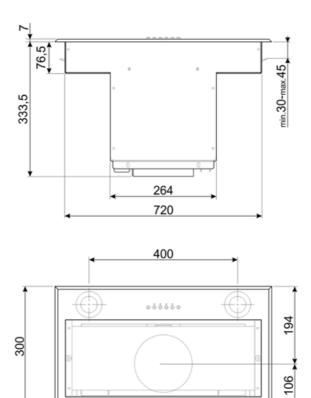

770



SMEG SPA 12/6/2025



Compatible Accessories



FLT4
Charcoal filter Kit 1 piece

SMEG SPA 12/6/2025



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.

SMEG SPA 12/6/2025