

KSEG78PXE



Product family	Hood
Tipo de Exaustor	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709224905
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo embutido



Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	No. of filters	2
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from ELECTRIC hob	500 mm
Free outlet maximum capacity	673 m³/h		

Motor power	275 W	Non return valve	Yes
-------------	-------	------------------	-----

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	261	46
Speed 2	436	58
Speed 3	606	65
Intensive speed	683	68

Accessories Included

Remote control	No	Tube reduction	No
----------------	----	----------------	----

Performance / Energy Label



Consumo anual de energía (CAE exaustor) 46 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 31.7

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 111.8 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 56.9 %

Grease Filtering Efficiency Class (GFEC) E

Air flow at minumum speed (Qmin) 261 m³/h

Air flow at maximum speed (Qmax) 606 m³/h

Air flow at boost speed (Qboost) 683 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 65 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 68 dBA

Power consumption in stand-by mode (Ps) 0.49 W

Time increase factor (F) 0.9

Measured air flow rate at best efficiency point (Qbep) 329 m³/h

Measured air pressure at best efficiency point (Pbep) 466 Pa

Measured electric power input at best efficiency point (Wbep) 134 W

Nominal Power consumption of the light system (WL) 2 W



Average illumination of the light on the cooking surface (Emiddle) 246 lux

Sound power level at highest setting (Lwa) 65 dBA


Electrical Connection

Plug No
Electrical connection rating 277 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Comprimento do cabo de alimentação 1500 mm

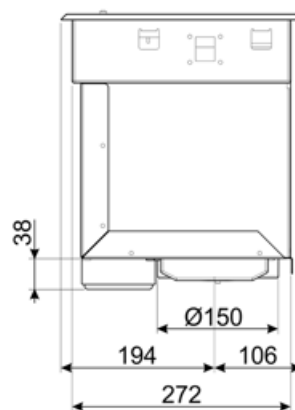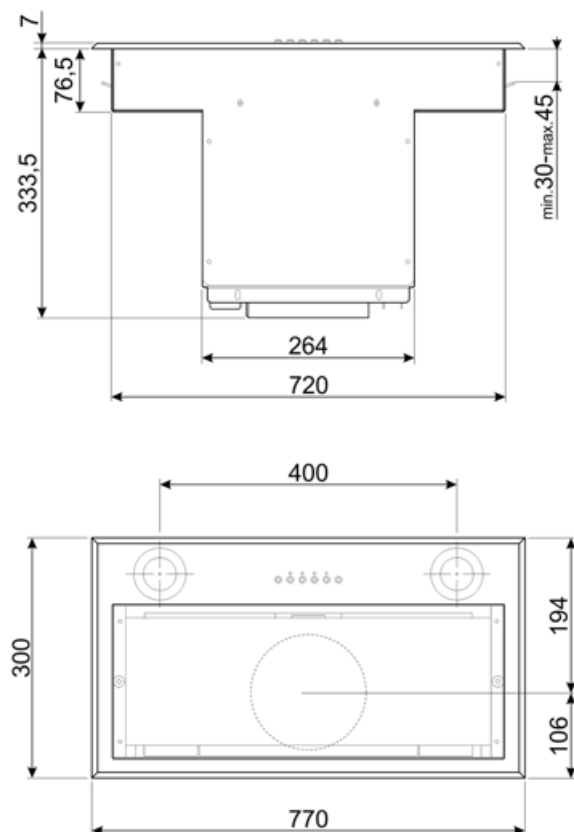

Compatible Accessories



FLT4

Filtro de carvão Kit 1 peça

Symbols glossary

	R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.		Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.
	Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.		Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.
	Configuração intensiva/turbo: quando a extração extra rápida é necessária.		

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones