

KSEG7XSA

Product family	Hood
Tipo de Exaustor	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	No
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709271350
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo serigrafado



Controls

Control setting	Electronic buttons	Led color	Red
-----------------	--------------------	-----------	-----

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

Technical Features

			
Hood without motor	No	No. of filters	2
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	No
Light Power	5 W	Vent outlet	150 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	3000 °K		
Free outlet maximum capacity	691 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	275 W		

Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	288	54
Speed 2	428	62
Speed 3	559	70
Intensive speed	691	74

Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	109 kWh/a
Energy efficiency class (EEC)	C
Fluid Dynamic Efficiency (FDE)	19,4
Fluid Dynamic Efficiency class (FDEC)	C
Lighting Efficiency (LE)	76,1 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	76 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	288 m³/h
Air flow at maximum speed (Qmax)	559 m³/h
Air flow at boost speed (Qboost)	691 m³/h




Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	54 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	70 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	74 dBA
Time increase factor (F)	1,3
Measured air flow rate at best efficiency point (Qbep)	448 m³/h
Measured air pressure at best efficiency point (Pbep)	334 Pa
Measured electric power input at best efficiency point (Wbep)	215 W
Nominal Power consumption of the light system (WL)	10 W
Average illumination of the light on the cooking surface (Emiddle)	761 lux
Sound power level at highest setting (Lwa)	70 dBA

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	285 W	Comprimento do cabo de alimentação	1000 mm
Voltage	220-240 V		

Optional accessories

Charcoal filter	KITFC220	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

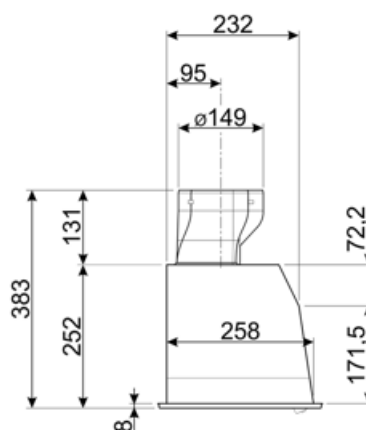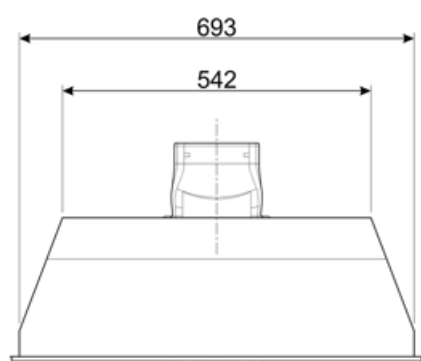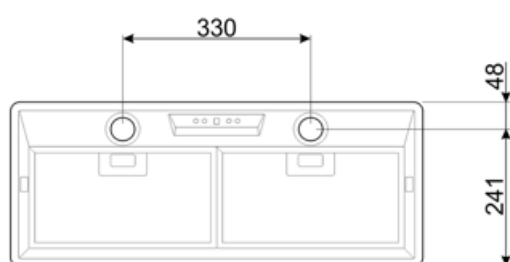

Compatible Accessories

KITFC220

Kit de filtros de carvão 2 peças



Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.

