

# KSEG90VXNE-2






Product family	Hood
Hood Type	Ceiling Cooker Hoods
Design	Ceiling
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223151
Aesthetics	Universal
Colour	Black
Finishing	Brushed
Glass Type	Black
Serigraphy colour	Black
Logo	Silk screen




## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	845 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	270 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	290	50
Speed 2	520	63
Speed 3	630	68
Intensive speed	800	71

## Accessories Included

Remote control Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 56 KWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 29.5

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 95 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 55.1 %

Grease Filtering Efficiency Class (GFEC) E

Air flow at mininum speed (Qmin) 290 m³/h

Maximum extraction rate 630 m³/h

Intensive extraction rate 800 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 50 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 68 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA

Power Consumption in Off mode (Po) 0.49 W

Time increase factor (F) 0.9

Measured air flow rate at best efficiency point (Qbep) 372 m³/h

Measured air pressure at best efficiency point (Qbep) 474 Pa

Measured electric power input at best efficiency point (Wbep) 166 W

Normal Power of the light system (WI) 2 W

Average illumination of the light on the cooking surface (Emiddle) 210 lux

Sound power level at highest setting (Lwa) 68 dBA

## Electrical Connection

Nominal power 272 W

Frequency (Hz) 50-60 Hz


Voltage	220-240 V	Power supply cable length	1500 mm
---------	-----------	---------------------------	---------

## Also available

Alternative colours available	White, Stainless steel	Available colours	KSEG90VXBE-2 - KSEG90XE-2
-------------------------------	------------------------	-------------------	---------------------------

## Optional accessories

Charcoal filter	KITFC152
-----------------	----------

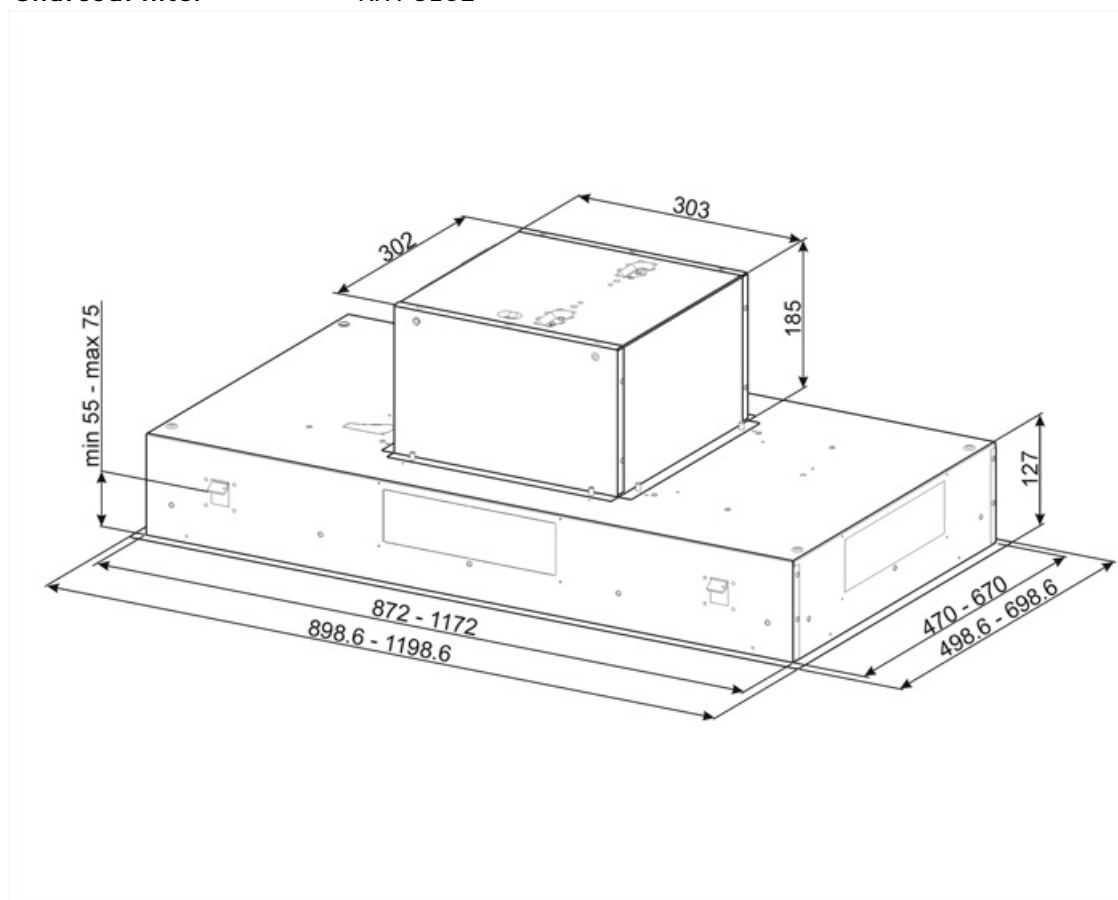

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



...



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

---

## Benefit

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones