


KSEG90XE-2






Product family	Hood
Hood Type	Ceiling Cooker Hoods
Design	Ceiling
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709223144
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Serigraphy colour	Black
Logo	Silk screen

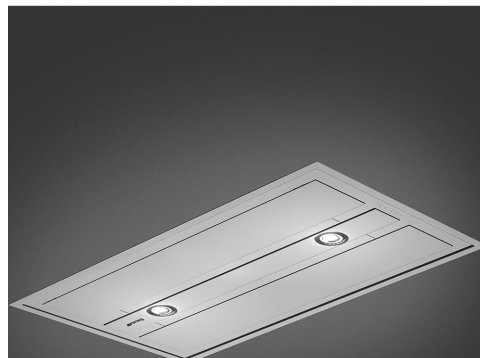

Controls

Control setting	Electronic buttons
------------------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1 W	Vent outlet	150 mm
Dimmer mode	Yes	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	845 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	270 W	Non return valve	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	290	50
Speed 2	520	63
Speed 3	630	68
Intensive speed	800	71

Accessories Included

Remote control Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	56 KWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dBA
Fluid Dynamic Efficiency (FDE)	29.5	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Power Consumption in Off mode (Po)	0.49 W
Lighting Efficiency (LE)	95 lux/W	Time increase factor (F)	0.9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	372 m ³ /h
Grease Filtering Efficiency (GFE)	55.1 %	Measured air pressure at best efficiency point (Qbep)	474 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	166 W
Air flow at minumum speed (Qmin)	290 m ³ /h	Normal Power of the light system (WI)	2 W
Maximum extraction rate	630 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	210 lux
Intensive extraction rate	800 m ³ /h	Sound power level at highest setting (Lwa)	68 dBA

Electrical Connection

Nominal power 272 W Frequency (Hz) 50-60 Hz


Voltage	220-240 V	Power supply cable length	1500 mm
---------	-----------	---------------------------	---------

Also available







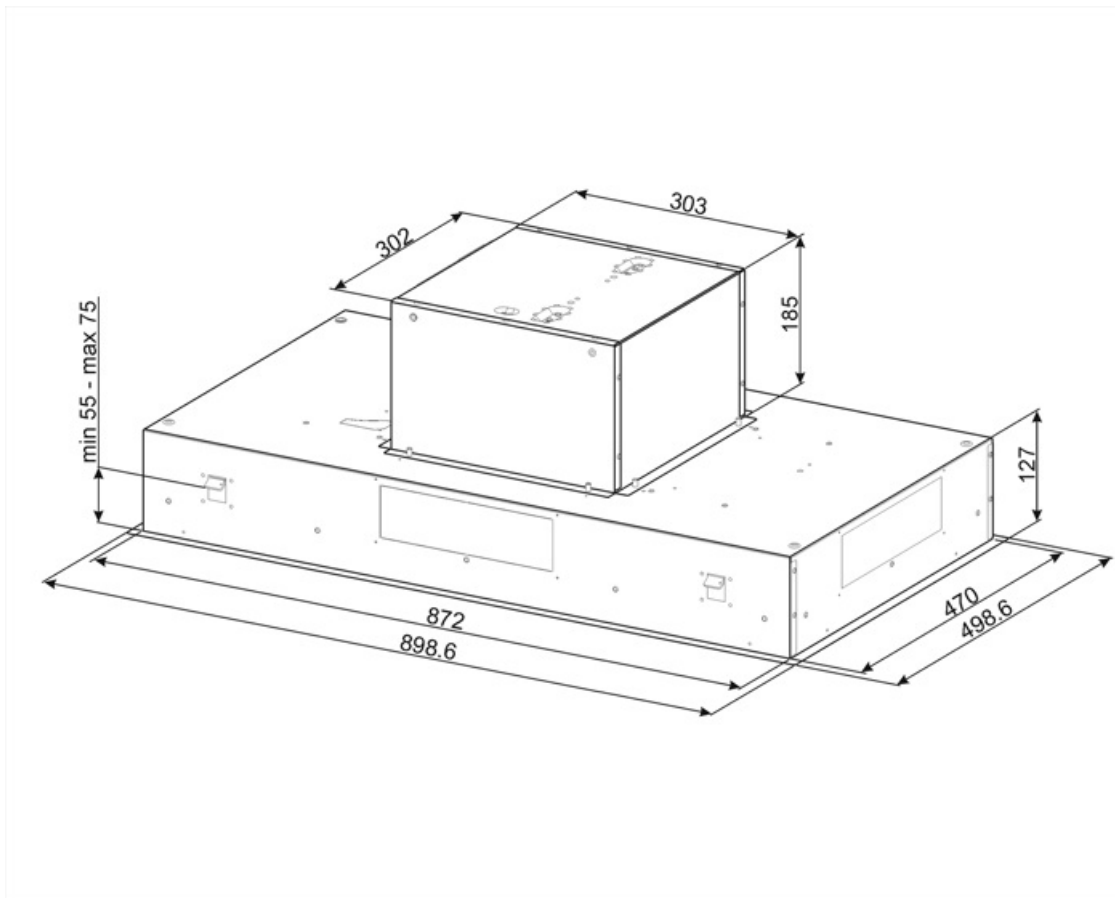


Alternative colours available	White, Black	Available colours	KSEG90VXBE - KSEG90VXNE
-------------------------------	--------------	-------------------	----------------------------

Optional accessories

Charcoal filter	KITFC152
-----------------	----------



Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  ...
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  Warning light(s): to advise when filters need changing.
-  Perimeter extraction panels: very efficient and aid noise reduction.