


KSEG90XE-2






| | |
|----------------------|---------------------------------------|
| Product family | Hood |
| Hood Type | Ceiling Cooker Hoods |
| Design | Ceiling |
| Extraction | Ducted out or re-circulation possible |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709223144 |
| Aesthetics | Universal |
| Colour | Stainless steel |
| Finishing | Brushed |
| Serigraphy colour | Black |
| Logo | Silk screen |

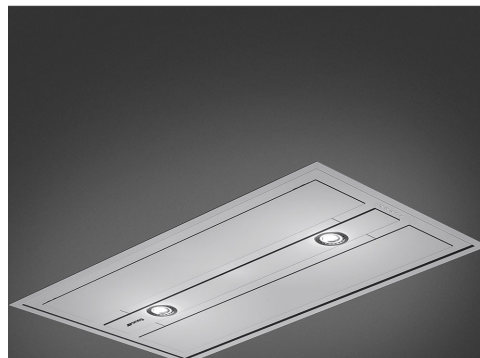

Controls

| | |
|-----------------|--------------------|
| Control setting | Electronic buttons |
|-----------------|--------------------|

Program / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |

Technical Features



| | | | |
|------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | Anti-grease filters | Aluminium |
| Light type | LED | Filter replacement indicator | Yes |
| Light power | 1 W | Vent outlet | 150 mm |
| Dimmer mode | Yes | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 845 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 270 W | Non return valve | Yes |
| No. of filters | 3 | | |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 290 | 50 |
| Speed 2 | 520 | 63 |
| Speed 3 | 630 | 68 |
| Intensive speed | 800 | 71 |

Accessories Included

Remote control Yes

Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 56 KWh/year | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dBA |
| Energy efficiency class (EEC) | A | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 68 dBA |
| Fluid Dynamic Efficiency (FDE) | 29.5 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA |
| Fluid Dynamic Efficiency class (FDEC) | A | Power Consumption in Off mode (Po) | 0.49 W |
| Lighting Efficiency (LE) | 95 lux/W | Time increase factor (F) | 0.9 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 372 m ³ /h |
| Grease Filtering Efficiency (GFE) | 55.1 % | Measured air pressure at best efficiency point (Qbep) | 474 Pa |
| Grease Filtering Efficiency Class (GFEC) | E | Measured electric power input at best efficiency point (Wbep) | 166 W |
| Air flow at minumum speed (Qmin) | 290 m ³ /h | Normal Power of the light system (WI) | 2 W |
| Maximum extraction rate | 630 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 210 lux |
| Intensive extraction rate | 800 m ³ /h | Sound power level at highest setting (Lwa) | 68 dBA |

Electrical Connection

Nominal power 272 W Frequency (Hz) 50-60 Hz


| | | | |
|---------|-----------|---------------------------|---------|
| Voltage | 220-240 V | Power supply cable length | 1500 mm |
|---------|-----------|---------------------------|---------|

Also available







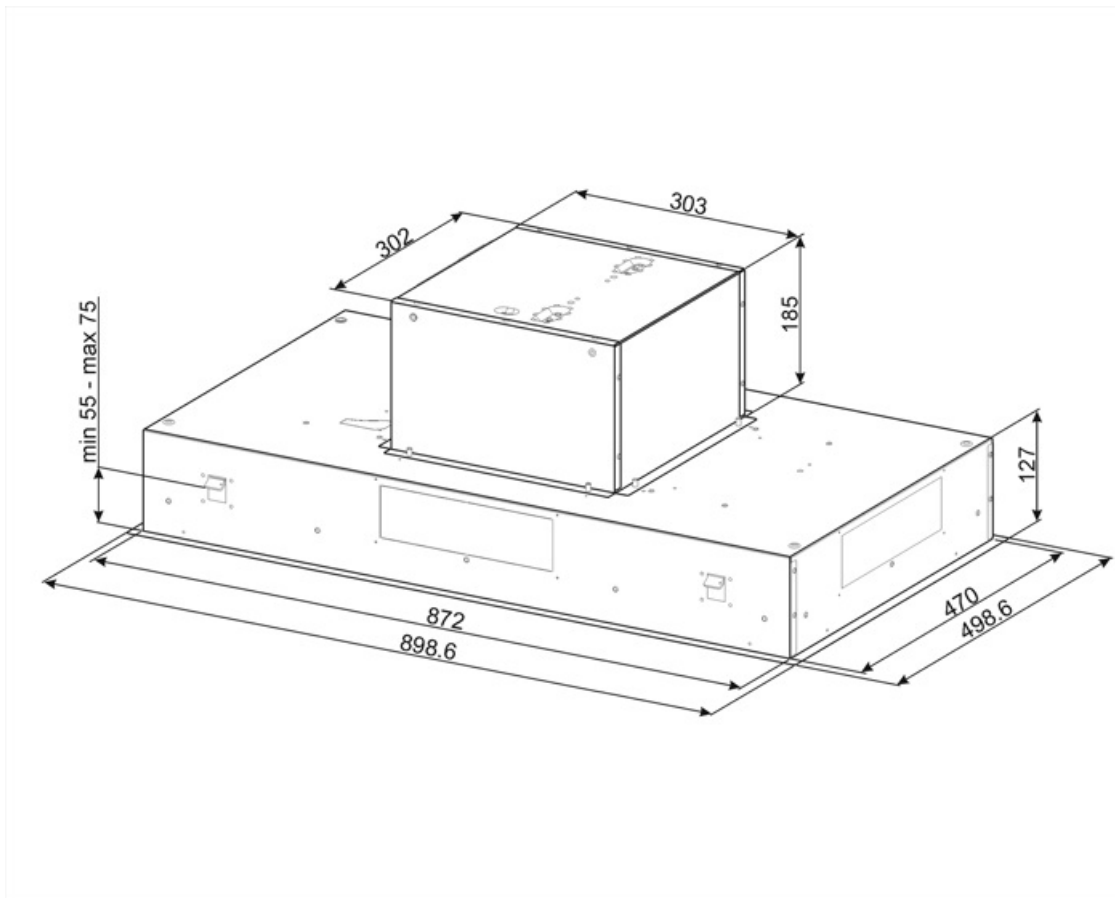


| | | | |
|-------------------------------|--------------|-------------------|----------------------------|
| Alternative colours available | White, Black | Available colours | KSEG90VXBE - KSEG90VXNE |
|-------------------------------|--------------|-------------------|----------------------------|

Optional accessories

| | |
|-----------------|----------|
| Charcoal filter | KITFC152 |
|-----------------|----------|



Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  ...
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  Warning light(s): to advise when filters need changing.
-  Perimeter extraction panels: very efficient and aid noise reduction.