

KSET51E2

| | |
|-------------------|------------------------|
| Product family | Hood |
| Hood Type | Integrated (semi) hood |
| Design | Telescopic |
| Extraction | Extraction |
| Material | Painted material |
| EAN code | 8017709309077 |
| Aesthetic | Universale |
| Colour | Silver |
| Finishing | Silver |
| Serigraphy colour | Black |
| Logo | Silk screen |



Controls

| | |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

Program / Functions

| | |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

Technical Features



| | | | |
|------------------------------|----------|------------------------------------|-----------|
| No. of lights | 2 | Anti-grease filters | Aluminium |
| Light type | LED | Charcoal filters included | Yes |
| Light Power | 4 W | Vent outlet | 120 mm |
| Free outlet maximum capacity | 315 m³/h | Minimum distance from GAS hob | 650 mm |
| Motor power | 125 W | Minimum distance from ELECTRIC hob | 450 mm |
| No. of filters | 2 | | |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 180 | 57 |
| Speed 2 | 220 | 62 |
| Speed 3 | 310 | 67 |

Performance / Energy Label




| | |
|--|----------|
| Annual Efficiency Consumption (AEChood) | 70 kWh/a |
| Energy efficiency class (EEC) | D |
| Fluid Dynamic Efficiency (FDE) | 8,1 |
| Fluid Dynamic Efficiency class (FDEC) | E |
| Lighting Efficiency (LE) | 13 lux/W |
| Lighting Efficiency Class (LEC) | D |
| Grease Filtering Efficiency (GFE) | 75,1 % |
| Grease Filtering Efficiency Class (GFEC) | C |
| Air flow at minumum speed (Qmin) | 180 m³/h |
| Air flow at maximum speed (Qmax) | 310 m³/h |

| | |
|---|----------|
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 57 dBA |
| Airborne acouistical A-weighted sound Power Emission at maximum speed (SPEmax) | 67 dBA |
| Time increase factor (F) | 1,7 |
| Energy Efficiency Index | 91,4 |
| Measured air flow rate at best efficiency point (Qbep) | 164 m³/h |
| Measured air pressure at best efficiency point (Pbep) | 183 Pa |
| Measured electric power input at best efficiency point (Wbep) | 103 W |
| Nominal Power consumption of the light system (WL) | 8 W |
| Average illumination of the light on the cooking surface (Emiddle) | 100 lux |
| Sound power level at highest setting (Lwa) | 67 dBA |

Electrical Connection

| | |
|------------------------------|--------------|
| Plug | (F;E) Schuko |
| Electrical connection rating | 133 W |
| Voltage | 220-240 V |

| | |
|---------------------------|---------|
| Frequency (Hz) | 50 Hz |
| Power supply cable length | 1000 mm |

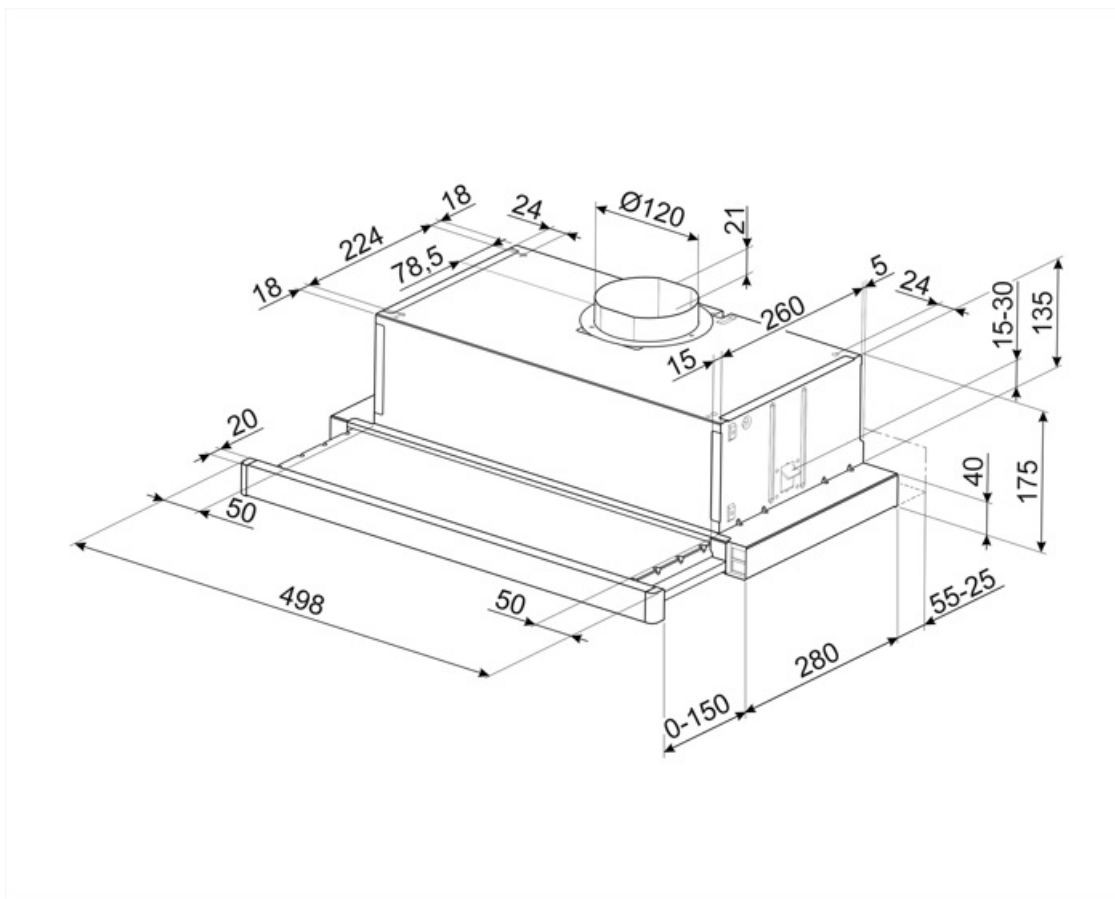

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.