


# KSET600HXE

Product family	Hood
Hood Type	Telescopic Cooker Hoods
Design	Telescopic
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709205386
Hood width	60 cm

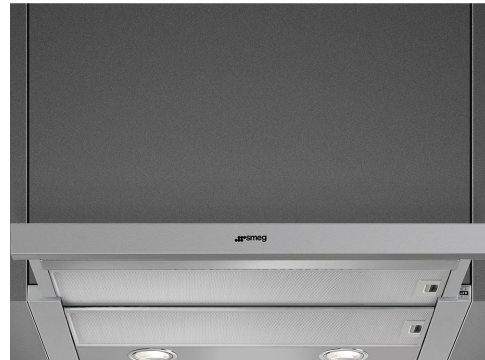

## Aesthetics

Aesthetics	Universal	Serigraphy colour	Black
Colour	Stainless steel	Logo	Silk screen
Finishing	Brushed		

## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light power	2 W	Vent outlet	150 mm
Light colour	3500 °K	Minimum distance from GAS hob	650 mm
temperature scale (°K)		Minimum distance from ELECTRIC hob	500 mm
Free outlet maximum capacity	610 m <sup>3</sup> /h	Non return valve	Yes
Motor power	220 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	48
Speed 2	332	53

Speed 3	496	63
Intensive speed	603	68

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	45 KWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Fluid Dynamic Efficiency (FDE)	30.9	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	68 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0.49 W
Lighting Efficiency (LE)	29 lux/W	Time increase factor (F)	0.9
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	76 %	Measured air pressure at best efficiency point (Qbep)	414 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	125 W
Air flow at mininum speed (Qmin)	256 m <sup>3</sup> /h	Normal Power of the light system (WI)	5 W
Maximum extraction rate	496 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	145 lux
Intensive extraction rate	603 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	63 dBA


## Electrical Connection

Nominal power	225 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

## Optional accessories

Charcoal filter

KITFC500

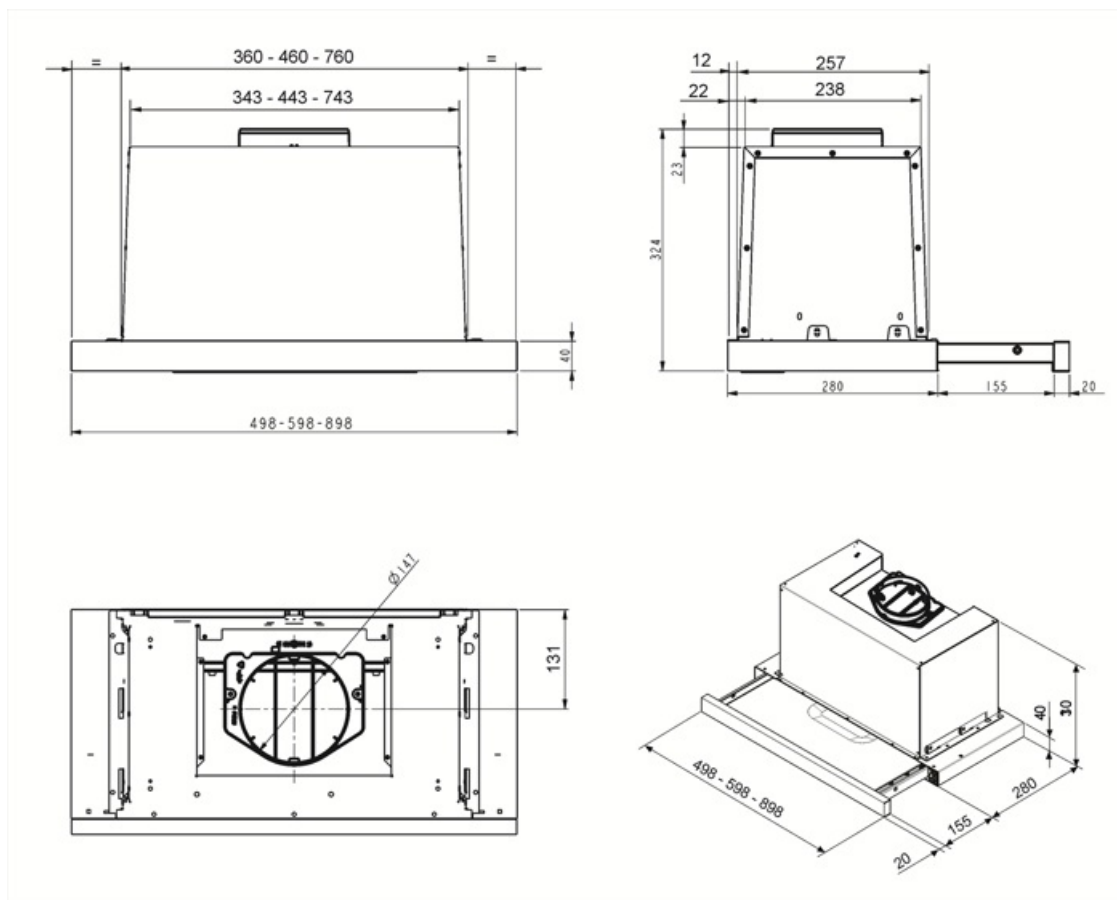

## Not included accessories

---



KITFC500

Round Charcoal filters (kit 2 pieces)

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**A:** Product drying performance, measured from A+++ to D / G depending on the product family



**Intensive/turbo setting:** when extra fast extraction is required.