

# KSET62E

|                   |                        |
|-------------------|------------------------|
| Product family    | Hood                   |
| Hood Type         | Integrated (semi) hood |
| Design            | Telescopic             |
| Extraction        | Extraction             |
| Material          | Painted material       |
| EAN code          | 8017709233044          |
| Hood width        | 60 cm                  |
| Aesthetic         | Universale             |
| Colour            | Silver                 |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |         |
|-----------------|---------|
| Control setting | Buttons |
|-----------------|---------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features

|  |   |                                    |           |
|--|---|------------------------------------|-----------|
|  |  |                                    |           |
| No. of lights  | 2   | No. of filters                     | 2         |
| Light type   | LED   | Anti-grease filters                | Aluminium |
| Light Power  | 3 W   | Vent outlet                        | 120 mm    |
| Light color temperature scale (K)  | 2700 K  | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity   | 304 m <sup>3</sup> /h   | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power  | 115 W   | Non return valve                   | Yes       |

|         | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 125   | 46                               |
| Speed 2 | 160   | 48                               |

|            |     |    |
|------------|-----|----|
| Speed<br>3 | 304 | 62 |
|------------|-----|----|

## Performance / Energy Label







|   |                       |   |                       |
|---|-----------------------|---|-----------------------|
| <b>Annual Efficiency Consumption (AEChood)</b>  | 62 kWh/a              | <b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b> | 46 dBA                |
| <b>Energy efficiency class (EEC)</b>            | D                     | <b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>  | 62 dBA                |
| <b>Fluid Dynamic Efficiency (FDE)</b>           | 10.3                  | <b>Time increase factor (F)</b>   | 1.6                   |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>    | E                     | <b>Measured air flow rate at best efficiency point (Qbep)</b>                         | 198 m <sup>3</sup> /h |
| <b>Lighting Efficiency (LE)</b>                 | 13 lux/W              | <b>Measured air pressure at best efficiency point (Pbep)</b>                          | 187 Pa                |
| <b>Lighting Efficiency Class (LEC)</b>          | D                     | <b>Measured electric power input at best efficiency point (Wbep)</b>                  | 99 W                  |
| <b>Grease Filtering Efficiency (GFE)</b>        | 66 %                  | <b>Nominal Power consumption of the light system (WL)</b>                             | 6 W                   |
| <b>Grease Filtering Efficiency Class (GFEC)</b> | D                     | <b>Average illumination of the light on the cooking surface (Emiddle)</b>             | 78 lux                |
| <b>Air flow at minumum speed (Qmin)</b>         | 125 m <sup>3</sup> /h | <b>Sound power level at highest setting (Lwa)</b>                                     | 62 dBA                |
| <b>Air flow at maximum speed (Qmax)</b>         | 304 m <sup>3</sup> /h |   |                       |

## Electrical Connection

|                                     |           |                                  |             |
|-------------------------------------|-----------|----------------------------------|-------------|
| <b>Electrical connection rating</b> | 121 W     | <b>Power supply cable length</b> | 1500 mm     |
| <b>Voltage</b>                      | 220-240 V | <b>Plug</b>                      | Not present |
| <b>Frequency (Hz)</b>               | 50-60 Hz  |                                  |             |

## Optional accessories

|                        |         |
|------------------------|---------|
| <b>Charcoal filter</b> | KITFC62 |
|------------------------|---------|

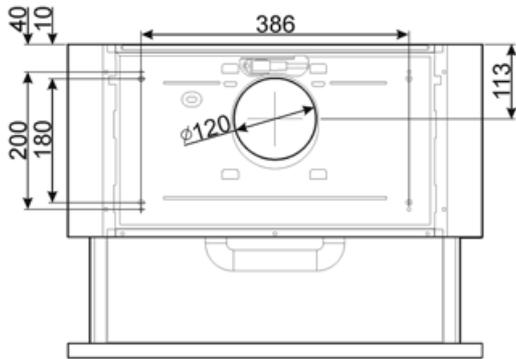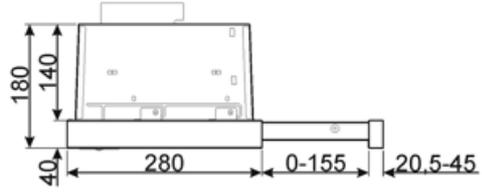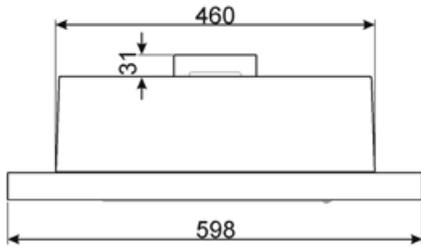

---

## Compatible Accessories

---

KITFC62

Charcoal filter round (kit 2 pieces)



---

## Symbols glossary

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.