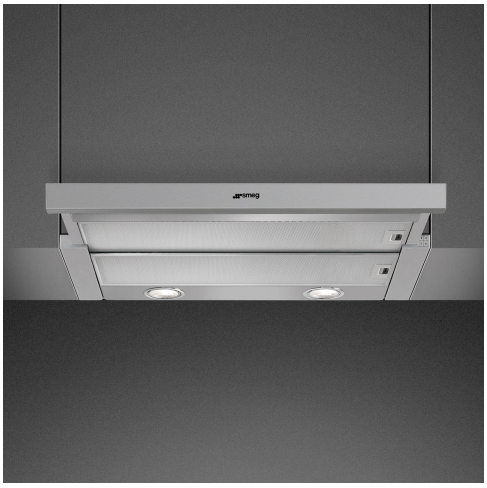
KSET666XE

Product family	Hood
Hood Type	Telescopic Cooker Hoods
Design	Telescopic
Extraction	Ducted out or re-circulation possible
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235116
Hood width	60 cm
Aesthetics	Universal
Colour	Silver
Serigraphy colour	Black
Logo	Silk screen



Controls

Control setting	Buttons

Program / Functions

No. of speeds	3

Technical Features

No. of lights	2	**No. of filters**	2
Light type	LED	**Anti-grease filters**	Aluminium
Light power	2.5 W	**Vent outlet**	150 mm
Light colour temperature scale (K)	3500 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	664 m³/h	**Minimum distance from ELECTRIC hob**	430 mm
Motor power	200 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	**Noise level IEC 60704-2-13 [dBA]**
Speed 1	256	46
Speed 2	377	55

Speed 3	647	67

Accessories Included

Tube reduction	Yes

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	39 kWh/year
Energy efficiency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	33.5
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	29 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	66 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minumum speed (Qmin)	256 m³/h
Maximum extraction rate	647 m³/h

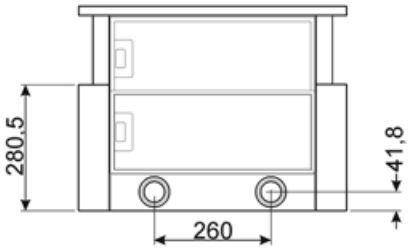
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Time increase factor (F)	1.00
Measured air flow rate at best efficiency point (Qbep)	336 m³/h
Measured air pressure at best efficiency point (Qbep)	434 Pa
Measured electric power input at best efficiency point (Wbep)	121 W
Normal Power of the light system (WI)	5 W
Average illumination of the light on the cooking surface (Emiddle)	145 lux
Sound power level at highest setting (Lwa)	67 dBA


Electrical Connection

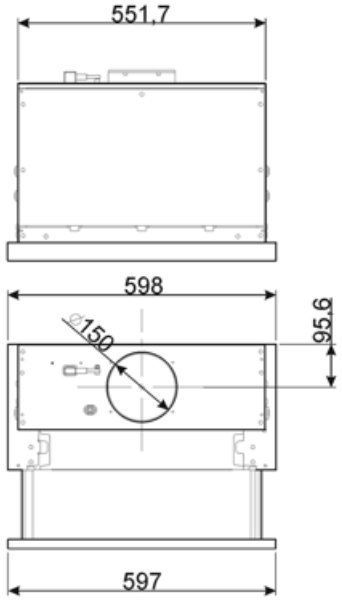
Nominal power	205 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1500 mm
Plug	No

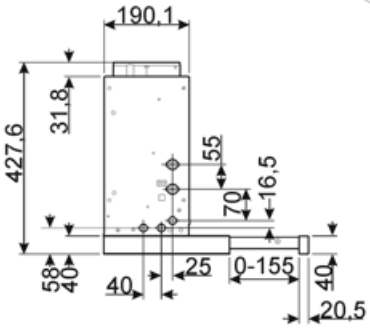
Optional accessories


Charcoal filter	KITFC400
Non return valve	Yes


280.5
41.8
260





551.7
598
95.6
150
597


190.1
427.6
31.8
55
70
16.5
58
40
40
25
0-155
40
20.5


≥ Min.430
≥ Min.650

Compatible Accessories



KITFC400

Charcoal filters Kit 2 pieces

Symbols glossary



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.