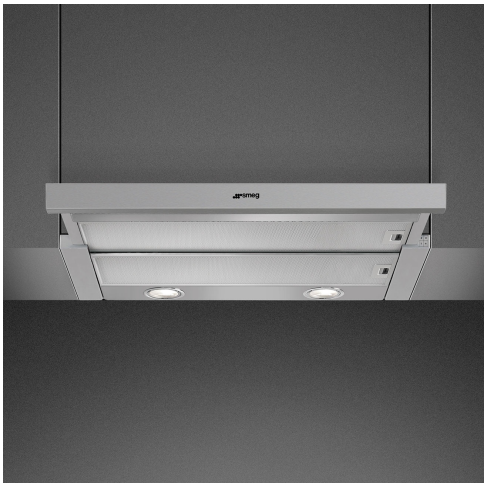
# KSET666XE

| | |
|---|---|
| **Product family** | Hood |
| **Hood Type** | Telescopic Cooker Hoods |
| **Design** | Telescopic |
| **Extraction** | Ducted out or re-circulation possible |
| **Material** | Stainless steel |
| **Type of steel** | Brushed |
| **EAN code** | 8017709235116 |
| **Hood width** | 60 cm |
| **Aesthetics** | Universal |
| **Colour** | Silver |
| **Serigraphy colour** | Black |
| **Logo** | Silk screen |



## Controls

| | |
|---|---|
| **Control setting** | Buttons |

## Program / Functions

| | |
|---|---|
| **No. of speeds** | 3 |

## Technical Features

| | | | |
|---|---|---|---|
| **No. of lights** | 2 | **No. of filters** | 2 |
| **Light type** | LED | **Anti-grease filters** | Aluminium |
| **Light power** | 2.5 W | **Vent outlet** | 150 mm |
| **Light colour temperature scale (K)** | 3500 K | **Minimum distance from GAS hob** | 650 mm |
| **Free outlet maximum capacity** | 664 m³/h | **Minimum distance from ELECTRIC hob** | 430 mm |
| **Motor power** | 200 W | **Non return valve** | Yes |

| | **Extraction rate IEC 61591 [m³/h]** | **Noise level IEC 60704-2-13 [dBA]** |
|---|---|---|
| Speed 1 | 256 | 46 |
| Speed 2 | 377 | 55 |

| | | |
|---|---|---|
| Speed 3 | 647 | 67 |

## Accessories Included

| | |
|---|---|
| **Tube reduction** | Yes |

## Performance / Energy Label



| | |
|---|---|
| **Annual Efficiency Consumption (AEChood)** | 39 kWh/year |
| **Energy efficiency class ( EEC)** | A |
| **Fluid Dynamic Efficiency (FDE)** | 33.5 |
| **Fluid Dynamic Efficiency class (FDEC)** | A |
| **Lighting Efficiency (LE)** | 29 lux/W |
| **Lighting Efficiency Class (LEC)** | A |
| **Grease Filtering Efficiency (GFE)** | 66 % |
| **Grease Filtering Efficiency Class (GFEC)** | D |
| **Air flow at minumum speed (Qmin)** | 256 m³/h |
| **Maximum extraction rate** | 647 m³/h |

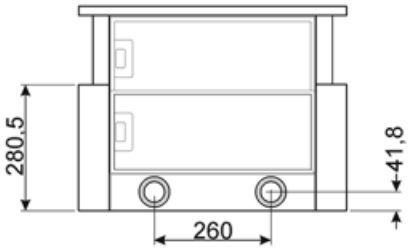
| | |
|---|---|
| **Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)** | 46 dBA |
| **Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** | 67 dBA |
| **Time increase factor (F)** | 1.00 |
| **Measured air flow rate at best efficiency point (Qbep)** | 336 m³/h |
| **Measured air pressure at best efficiency point (Qbep)** | 434 Pa |
| **Measured electric power input at best efficiency point (Wbep)** | 121 W |
| **Normal Power of the light system (WI)** | 5 W |
| **Average illumination of the light on the cooking surface (Emiddle)** | 145 lux |
| **Sound power level at highest setting (Lwa)** | 67 dBA |


## Electrical Connection

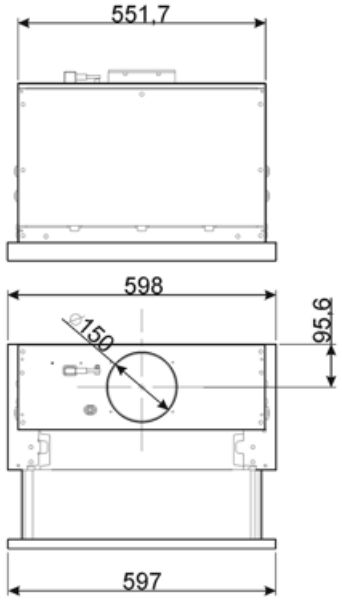
| | |
|---|---|
| **Nominal power** | 205 W |
| **Voltage** | 220-240 V |
| **Frequency (Hz)** | 50-60 Hz |
| **Power supply cable length** | 1500 mm |
| **Plug** | No |

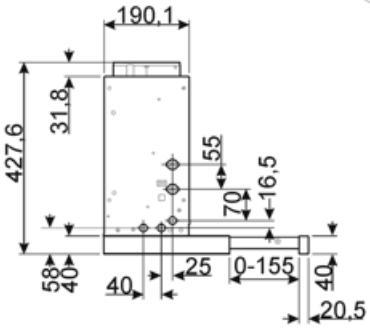
## Optional accessories


| | |
|---|---|
| **Charcoal filter** | KITFC400 |
| **Non return valve** | Yes |


280.5
41.8
260





551.7
598
95.6
150
597


190.1
427.6
31.8
55
70
16.5
58
40
40
25
0-155
40
20.5


≥ Min.430
≥ Min.650

## Compatible Accessories



**KITFC400**

Charcoal filters Kit 2 pieces

## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



A: Product drying performance, measured from A+++ to D / G depending on the product family