

# KSET666XE

Product family Hood

Hood Type Integrated (semi) hood

DesignTelescopicExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709235116

Hood width 60 cm

Aesthetic Universale
Colour Silver
Serigraphy colour Black
Logo Silk screen



### **Controls**

Control setting Buttons

### **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power2.5 WVent outlet150 mmLight color temperature3500 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 664 m³/h Minimum distance from 430 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	256	46
Speed 2	377	55



Speed 647	67
-----------	----

### Accessories included

Tube reduction Yes

## Performance / Energy Label

**Annual Efficiency** 39 kWh/a

Consumption (AEChood) Energy efficieency class A

(EEC)

Fluid Dynamic Efficiency 33.5

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 29 lux/W

Lighting Efficiency Class A

(LEC)

**Grease Filtering** 66 %

Efficiency (GFE)

**Grease Filtering** D

Efficiency Class (GFEC)

Air flow at minumum speed (Qmin)

Air flow at maximum

speed (Qmax)

Airbourne acouistical A- 46 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-67 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Time increase factor (F) 1.00 Measured air flow rate 336 m<sup>3</sup>/h

at best efficiency point

(Qbep)

Measured air pressure 434 Pa

at best efficiency point

(Pbep)

Measured electric 121 W

power input at best efficiency point (Wbep)

Nominal Power 5 W

consumption of the light

system (WL)

Average illumination of 145 lux

the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)

67 dBA

#### **Electrical Connection**

**Electrical connection** 

205 W

256 m<sup>3</sup>/h

647 m<sup>3</sup>/h

220-240 V

Frequency (Hz) 50-60 Hz Power supply cable

length

Plug

1500 mm

Not present

### Optional accessories

Charcoal filter

rating


Voltage

KITFC400

Non return valve

Yes



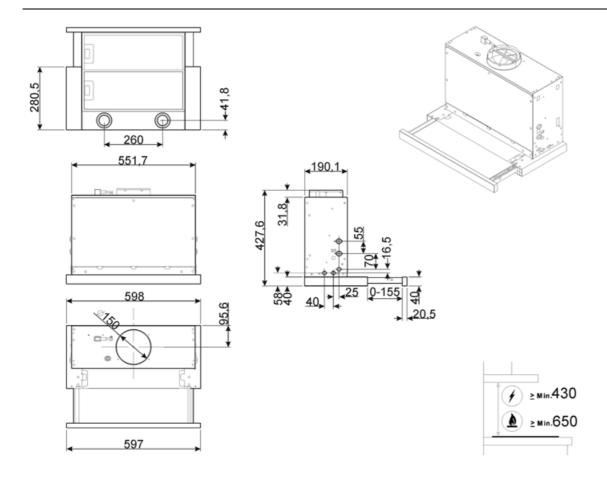



# **Compatible Accessories**



KITFC400

Charcoal filters Kit 1 piece



## Symbols glossary



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.