

KSET66E2

| | |
|-------------------|------------------------|
| Product family | Hood |
| Hood Type | Integrated (semi) hood |
| Design | Telescopic |
| Extraction | Extraction |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709346102 |
| Hood width | 60 cm |
| Aesthetic | Universale |
| Colour | Stainless steel |
| Finishing | Satin |
| Serigraphy colour | Black |
| Logo | Silk screen |



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features



| | | | |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 2 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 1 W | Vent outlet | 150 mm |
| Light color temperature scale (K) | 4000 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 620 m ³ /h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 140 W | Non return valve | Yes |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 260 | 47 |
| Speed 2 | 400 | 54 |

| | | |
|------------|-----|----|
| Speed 3 | 610 | 63 |
|------------|-----|----|

Performance / Energy Label




| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 79 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 47 dBA |
| Energy efficiency class (EEC) | C | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 63 dBA |
| Fluid Dynamic Efficiency (FDE) | 18.30 | Time increase factor (F) | 1.3 |
| Fluid Dynamic Efficiency class (FDEC) | C | Energy Efficiency Index | 74.4 |
| Lighting Efficiency (LE) | 59 lux/W | Measured air flow rate at best efficiency point (Qbep) | 360 m ³ /h |
| Lighting Efficiency Class (LEC) | A | Measured air pressure at best efficiency point (Pbep) | 300 Pa |
| Grease Filtering Efficiency (GFE) | 76 % | Measured electric power input at best efficiency point (Wbep) | 164 W |
| Grease Filtering Efficiency Class (GFEC) | C | Nominal Power consumption of the light system (WL) | 2.2 W |
| Air flow at minumum speed (Qmin) | 260 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 130 lux |
| Air flow at maximum speed (Qmax) | 610 m ³ /h | Sound power level at highest setting (Lwa) | 63 dBA |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 162 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

Also available

| | | | |
|-------------------------------|----------------------------|-------------------|-----------------------------------|
| Alternative colours available | White, Black, Silver Glass | Available colours | KSET66VBE - KSET66VNE - KSET66VSE |
|-------------------------------|----------------------------|-------------------|-----------------------------------|

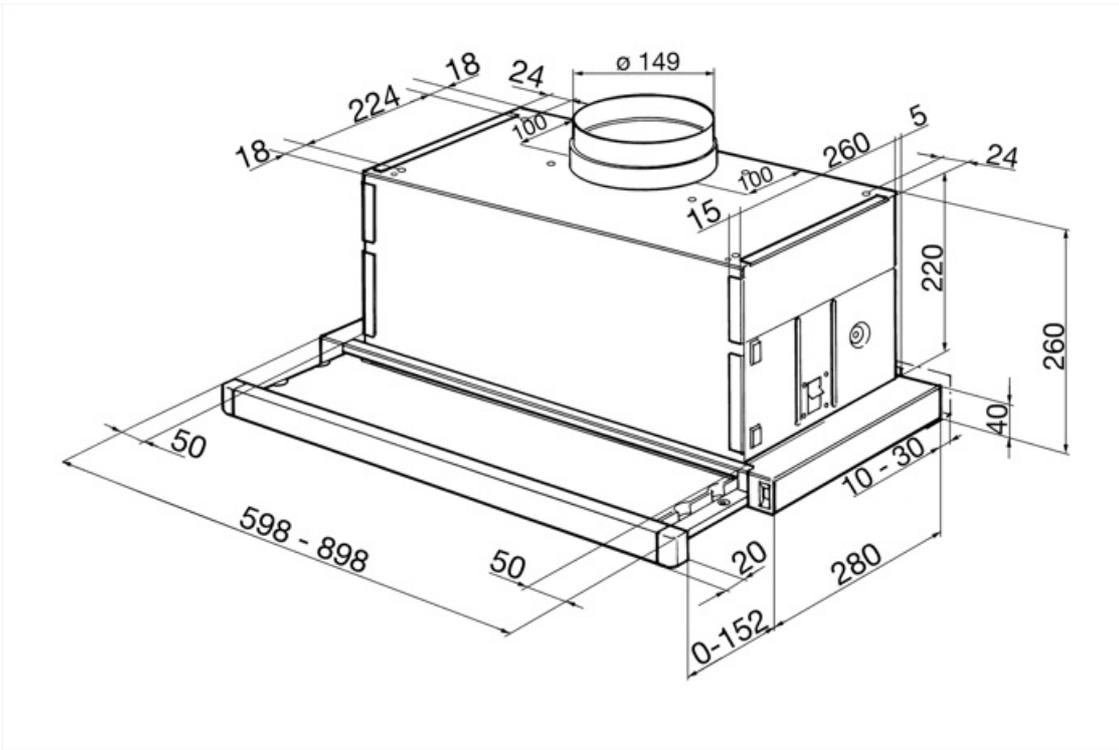

Compatible Accessories

KITFC152

Charcoal filters Round Kit 2 pieces



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

