

# KSET86LX3

## Product family

|                   |                        |
|-------------------|------------------------|
| Hood Type         | Integrated (semi) hood |
| Design            | Visible front panel    |
| Extraction        | Extraction             |
| Material          | Stainless steel        |
| Type of steel     | Brushed                |
| EAN code          | 8017709333645          |
| Hood width        | 86 cm                  |
| Aesthetic         | Universale             |
| Colour            | Stainless steel        |
| Finishing         | Satin                  |
| Glass Type        | Clear                  |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features



|                                   |                       |                                    |           |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights                     | 2                     | No. of filters                     | 2         |
| Light type                        | LED                   | Anti-grease filters                | Aluminium |
| Light Power                       | 6 W                   | Vent outlet                        | 120 mm    |
| Light color temperature scale (K) | 2700 K                | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity      | 237 m <sup>3</sup> /h | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                       | 75 W                  |                                    |           |

|         | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 132   | 44                               |
| Speed 2 | 165   | 43                               |

|         |     |    |
|---------|-----|----|
| Speed 3 | 230 | 53 |
|---------|-----|----|

## Accessories included


Tube reduction Yes

## Performance / Energy Label

|  |            |
|--|------------|
|  |            |
| Annual Efficiency Consumption (AEChood)  | 49 kWh/a   |
| Energy efficiency class (EEC)  | C          |
| Fluid Dynamic Efficiency (FDE)   | 8,4        |
| Fluid Dynamic Efficiency class (FDEC)  | E          |
| Lighting Efficiency (LE)   | 20,1 lux/W |
| Lighting Efficiency Class (LEC)  | B          |
| Grease Filtering Efficiency (GFE)  | 65,1 %     |
| Grease Filtering Efficiency Class (GFEC)   | D          |
| Air flow at minimum speed (Qmin)   | 130 m³/h   |
| Air flow at maximum speed (Qmax)   | 225 m³/h   |
| Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)     | A- 47 dBA  |
| Airborne acoustical weighted sound Power Emission at maximum speed (SPEmax)      | A- 55 dBA  |
| Time increase factor (F)   | 1,7        |
| Energy Efficiency Index  | 84,1       |
| Measured air flow rate at best efficiency point (Qbep)                           | 135 m³/h   |
| Measured air pressure at best efficiency point (Pbep)                            | 160 Pa     |
| Measured electric power input at best efficiency point (Wbep)                    | 72 W       |
| Nominal Power consumption of the light system (WL)                               | 6 W        |
| Average illumination of the light on the cooking surface (Emiddle)               | 121 lux    |
| Sound power level at highest setting (Lwa)                                       | 55 dBA     |

## Electrical Connection

|                              |           |                           |             |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 81 W      | Power supply cable length | 1500 mm     |
| Voltage                      | 220-240 V | Plug                      | Not present |
| Frequency (Hz)               | 50-60 Hz  |                           |             |

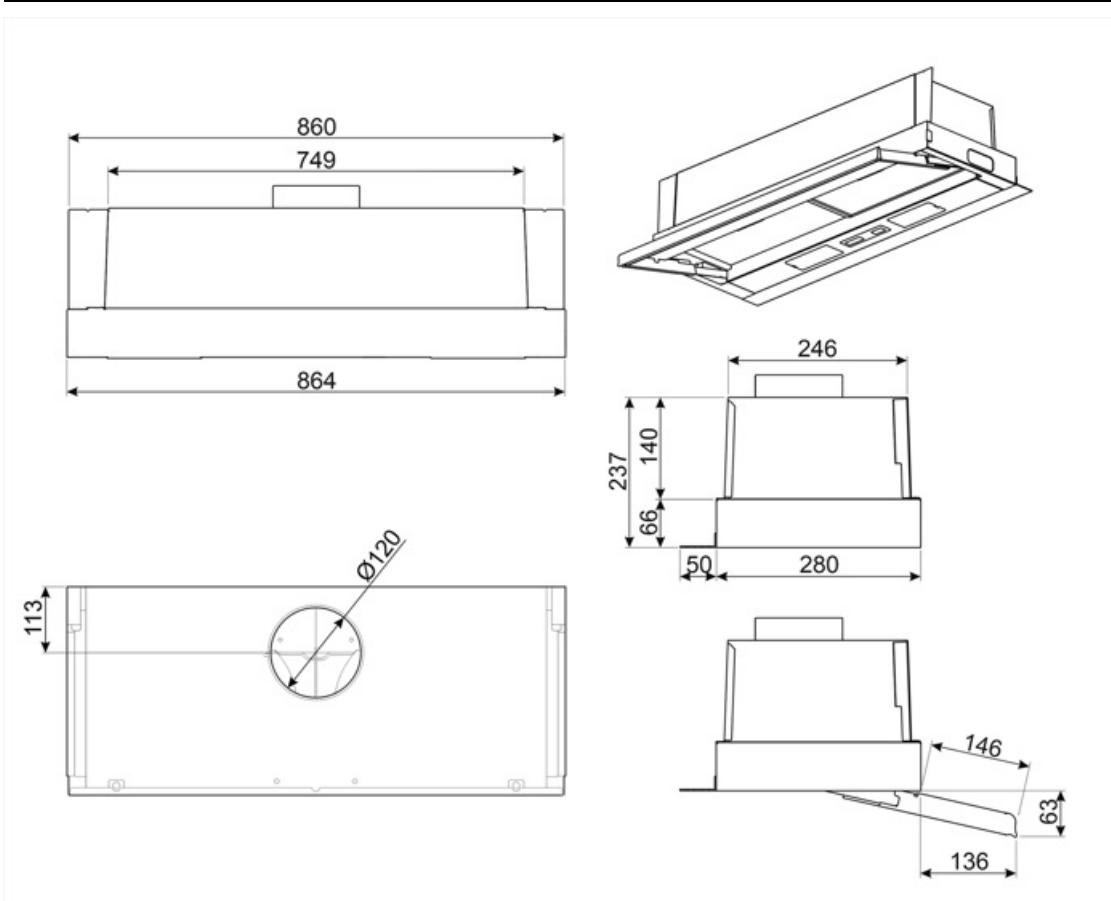



---

## Compatible Accessories

---

**KITFC62**

Charcoal filter round (kit 2 pieces)



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.