

KSET86LXE2

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Visible front panel
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709279509
Hood width	86 cm



Aesthetics

Aesthetic	Universale	Glass Type	Clear
Colour	Stainless steel	Serigraphy colour	Black
Finishing	Satin	Logo	Silk screen

Controls

Control setting	Slider
-----------------	--------

Programme / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light Power	2.5 W	Vent outlet	120 mm
Light color temperature scale (°K)	3500 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	265 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	115 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	102	46
Speed 2	135	52
Speed 3	257	64

Accessories Included

Tube reduction Yes

Performance / Energy Label

D


Annual Efficiency Consumption (AEHood) 68 kWh/a
Energy efficiency class (EEC) D
Fluid Dynamic Efficiency (FDE) 8,7
Fluid Dynamic Efficiency class (FDEC) E
Lighting Efficiency (LE) 28,1 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 66 %
Grease Filtering Efficiency Class (GFEC) D
Air flow at minumum speed (Qmin) 100 m³/h
Air flow at maximum speed (Qmax) 255 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dB(A)
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 66 dB(A)
Time increase factor (F) 1,7
Energy Efficiency Index 90,6
Measured air flow rate at best efficiency point (Qbep) 155 m³/h
Measured air pressure at best efficiency point (Pbep) 210 Pa
Measured electric power input at best efficiency point (Wbep) 104 W
Nominal Power consumption of the light system (WL) 5 W
Average illumination of the light on the cooking surface (Emiddle) 141 lux
Sound power level at highest setting (Lwa) 66 dB(A)

Electrical Connection

Electrical connection rating 120 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm

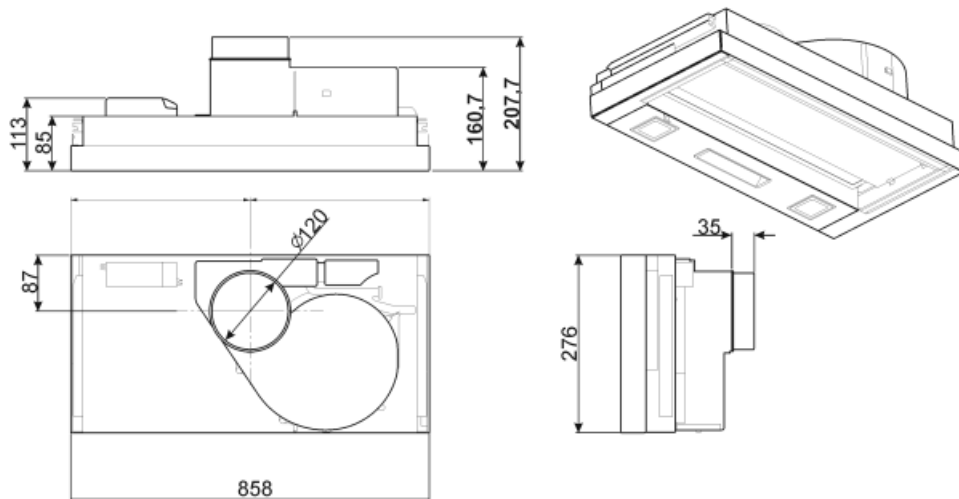

Not included accessories



KITFC300

Charcoal filter Kit 1 piece dimension 208x170 mm

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



D: Product energy rating, measured from A+++ to D / G depending on the product family.