

# KSET900XE

|                   |                        |
|-------------------|------------------------|
| Product family    | Hood                   |
| Hood Type         | Integrated (semi) hood |
| Design            | Telescopic             |
| Extraction        | Extraction             |
| Material          | Stainless steel        |
| Type of steel     | Brushed                |
| EAN code          | 8017709205379          |
| Hood width        | 90 cm                  |
| Aesthetic         | Universale             |
| Colour            | Stainless steel        |
| Finishing         | Satin                  |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features



|                                   |          |                                    |           |
|-----------------------------------|----------|------------------------------------|-----------|
| No. of lights                     | 2        | No. of filters                     | 2         |
| Light type                        | LED      | Anti-grease filters                | Aluminium |
| Light Power                       | 3 W      | Vent outlet                        | 150 mm    |
| Light color temperature scale (K) | 3500 K   | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity      | 600 m³/h | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                       | 175 W    | Non return valve                   | Yes       |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 240                              | 44                               |
| Speed 2 | 368                              | 54                               |





|         |     |    |
|---------|-----|----|
| Speed 3 | 581 | 65 |
|---------|-----|----|

## Performance / Energy Label

|                                                                                                                       |            |                                                                                       |          |
|-----------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------|----------|
|  <b>Energy efficiency class (EEC)</b> | B          | <b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b> | 44 dBA   |
| <b>Fluid Dynamic Efficiency (FDE)</b>                                                                                 | 21         | <b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>  | 65 dBA   |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>                                                                          | C          | <b>Time increase factor (F)</b>                                                       | 1,2      |
| <b>Lighting Efficiency (LE)</b>                                                                                       | 76,1 lux/W | <b>Energy Efficiency Index</b>                                                        | 69,4     |
| <b>Lighting Efficiency Class (LEC)</b>                                                                                | A          | <b>Measured air flow rate at best efficiency point (Qbep)</b>                         | 352 m³/h |
| <b>Grease Filtering Efficiency (GFE)</b>                                                                              | 76 %       | <b>Measured air pressure at best efficiency point (Pbep)</b>                          | 354 Pa   |
| <b>Grease Filtering Efficiency Class (GFEC)</b>                                                                       | C          | <b>Measured electric power input at best efficiency point (Wbep)</b>                  | 165 W    |
| <b>Air flow at minimum speed (Qmin)</b>                                                                               | 240 m³/h   | <b>Nominal Power consumption of the light system (WL)</b>                             | 4 W      |
| <b>Air flow at maximum speed (Qmax)</b>                                                                               | 581 m³/h   | <b>Average illumination of the light on the cooking surface (Emiddle)</b>             | 304 lux  |
|                                                                                                                       |            | <b>Sound power level at highest setting (Lwa)</b>                                     | 65 dBA   |

## Electrical Connection

|                                     |           |                                  |             |
|-------------------------------------|-----------|----------------------------------|-------------|
| <b>Electrical connection rating</b> | 215 W     | <b>Power supply cable length</b> | 1500 mm     |
| <b>Voltage</b>                      | 220-240 V | <b>Plug</b>                      | Not present |
| <b>Frequency (Hz)</b>               | 50-60 Hz  |                                  |             |

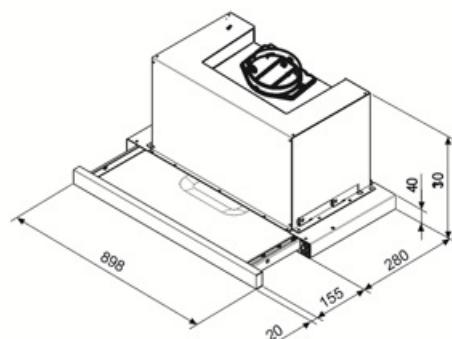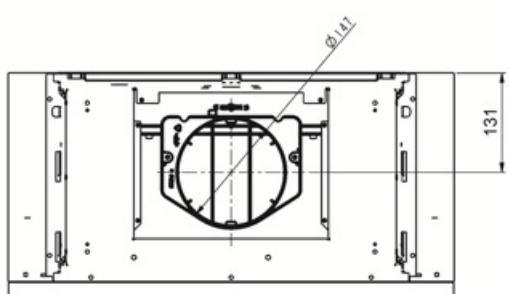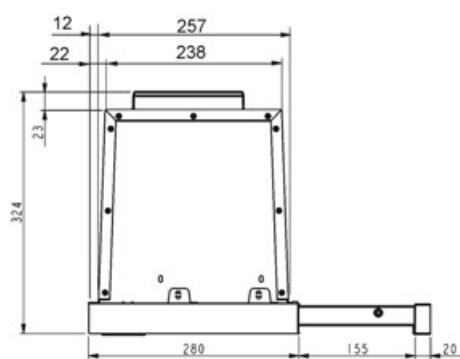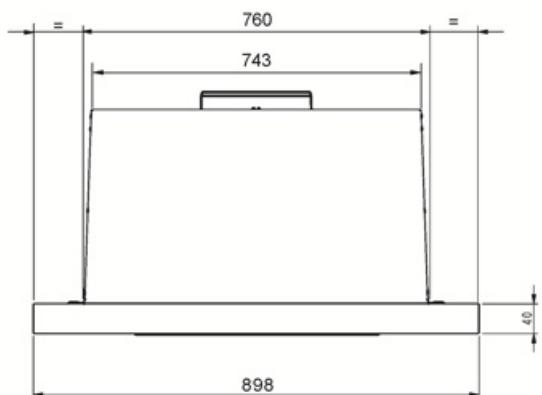



---

## Compatible Accessories

---

**KITFC500**



Round Charcoal filters (kit 2 pieces)

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

